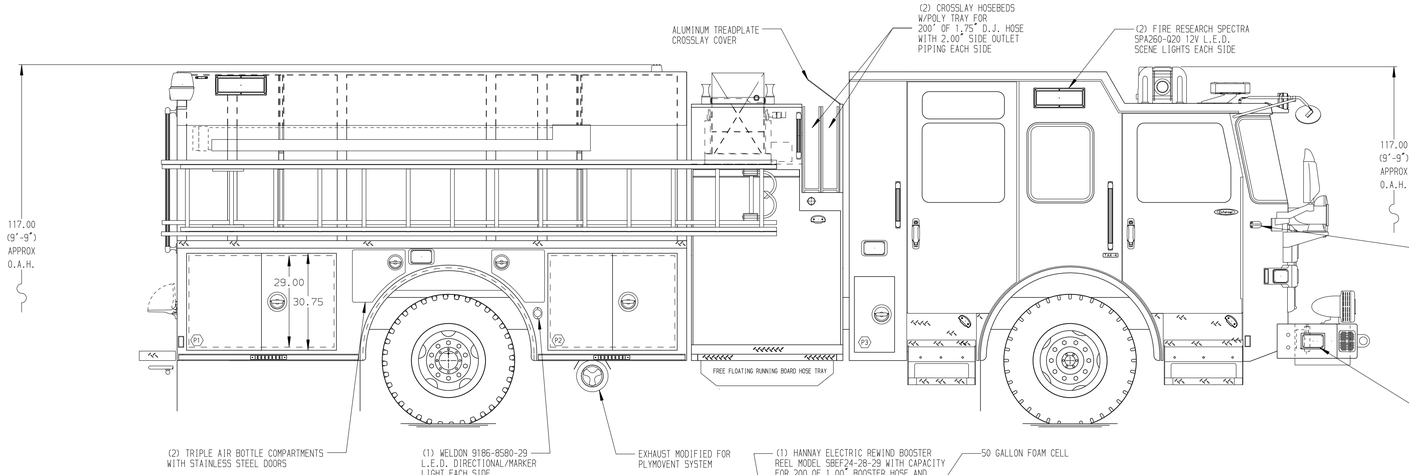

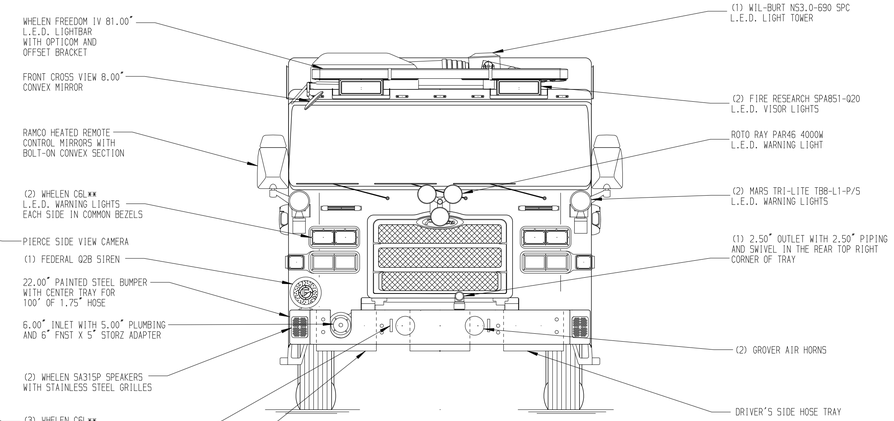

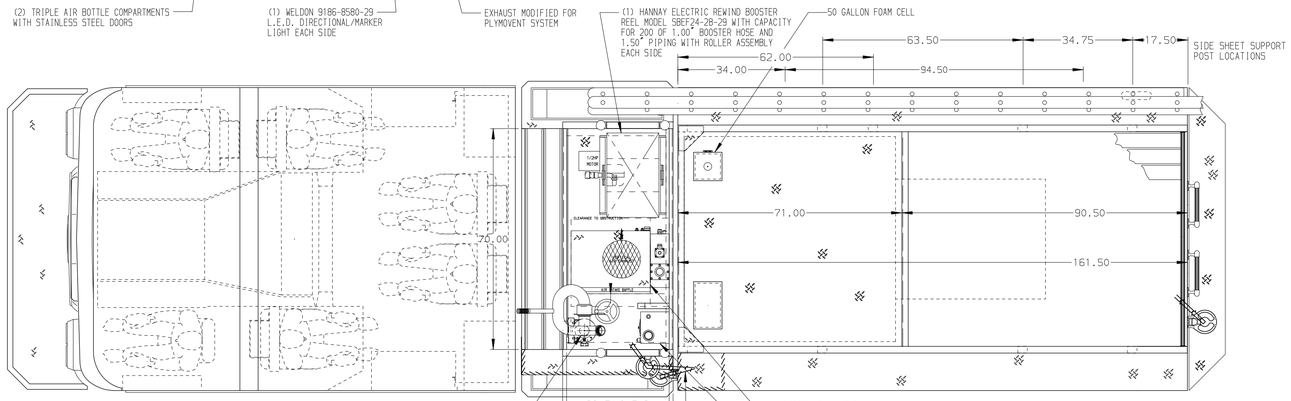

MERCEDES HOSEBED CAPACITIES

(1)	300' OF 1.75" AQUAFLOW HOSE
(2)	250' OF 2.50" AQUAFLOW HOSE
(3)	500' OF 3.00" AQUAFLOW HOSE
(4)	1200' OF 5.00" MEGAFLO HOSE
(5)	300' OF 3.00" AQUAFLOW HOSE
(6)	300' OF 3.00" AQUAFLOW HOSE

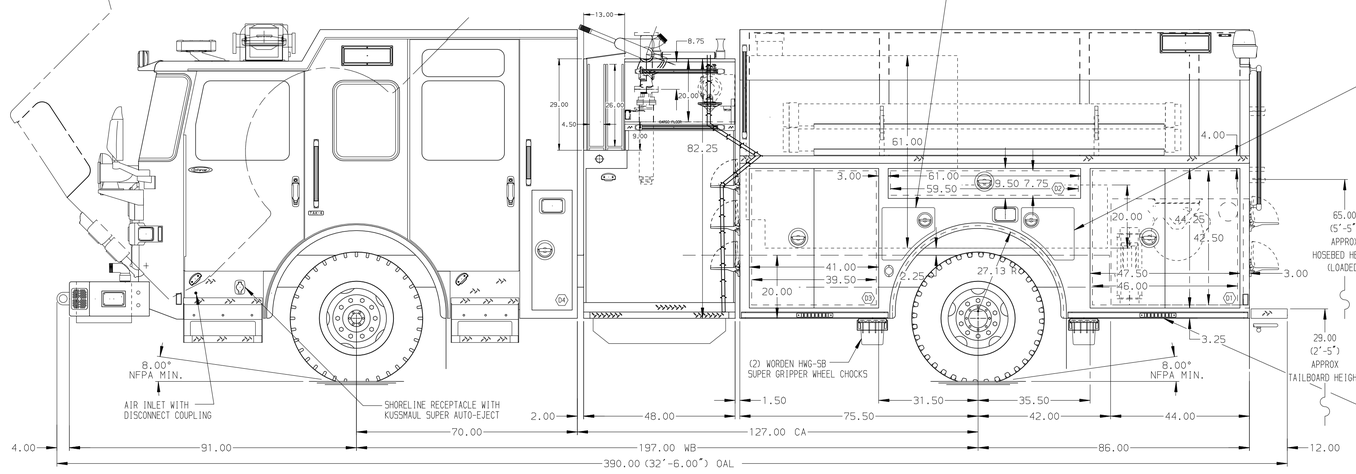

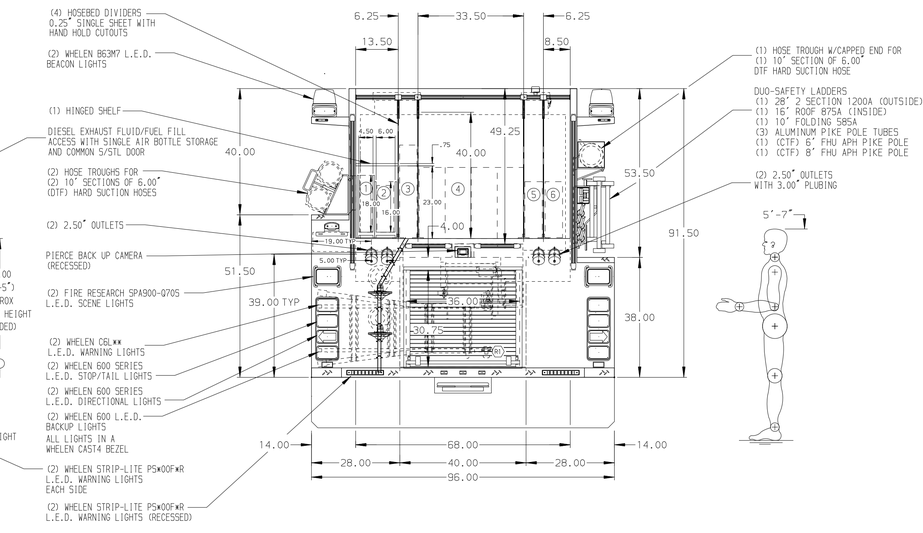

ALUMINUM BODY | MAXIMUM O.A.H. 120.00" | MAXIMUM O.A.L. 388.00" | SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. ROSCO WINDSHIELD MOUNTED CAMERA SYSTEM WITH DVR
3. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
4. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
5. STAINLESS STEEL SCUFFPLATE ON BODY REAR CORNERS
6. S/STL SCUFFPLATE ON BOTTOM EDGE OF DOOR FRAMING OF COMPARTMENTS D1,D3,P1,P2,R1
7. DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED IN COMPARTMENT R1
8. CIRCUIT BREAKER PANEL ON LOWER FORWARD WALL IN COMPARTMENT D3
9. ONE HANNAY 1622-17-18 CORD REEL WITH 250' OF 10/4 CABLE LOCATED IN COMPARTMENT R1
10. ALUMINUM 4-WAY ON TOP OF RAISED ROOF
11. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
12. ONE DUPLEX RECEPTACLE LOCATED IN CAB (GENERATOR)
13. THREE DUPLEX RECEPTACLES LOCATED IN CAB (SHORELINE)
14. GENERATOR METER PANEL LOCATED IN COMPARTMENT D3
15. ONE DUPLEX RECEPTACLE LOCATED IN COMPARTMENTS D1,D3,P1,P3

REV	DATE	BY	CH
2	24APR18	JWO	LAB
1	30MAR18	JWO	LAB

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: 1500-D-950P W/50G FOAM,161",BROOM D.S.,LOW P.S.,FDLER (2) X-LAYS,DELUGE,GENERATOR,LIGHT TOWER,CABLE REEL
FOR: NEW KINGSTOWN FIRE COMPANY, NEW KINGSTOWN, PENNSYLVANIA
DWG NO.: 32157AD

JOB NO.	32157
SCALE	1:24
DATE	
DRAWN BY	JWO
	07FEB18
CHECKED BY	NPA
	08FEB18
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 24-APR-2018 10:57:55