

# PUMPER BODY

Medium Aluminum 2nd Gen Pumper

# CHASSIS

Enforcer Chassis

# CHASSIS AXLE, FRONT, CUSTOM

19,500 Lb TAK-4 Axle

# AXLE, REAR

24,000 Lb Dana Axle

# ENGINE

450 HP Cummins L9 Engine

# TRANSMISSION

Allison 6th Gen, 3000 EVS P

# BUMPER

22" Extended Painted Steel

# CAB

7010 Enforcer Cab

# BODY

## TOTAL TANK CAPACITY

770 Gallon New York Style Poly Tank

## WATER CAPACITY

750 Gallons of Water

## FOAM CELL

20 Gallons of Foam

## COMPT, PUMPER, REAR

30.75" FF RoLup Rear Compt

## COMPT, PUMPER, LEFT SIDE

145" RoLup Full Height Front & Rear FDLER

## COMPT, PUMPER, RIGHT SIDE

145" RoLup Low FDLER

# FIRE SUPPRESSION PUMPHOUSE

45" Control Zone Side Mount

## PUMP

1500 GPM Waterous CSU

## CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

## CROSSLAYS, 2.50"

2.50" Crosslay Not Required

## SPEEDLAYS

SpeedLays Not Required

## GENERATOR

Generator Not Required

## FOAM SYSTEM

Foam System Not Required


# SAFETY

Side Roll and Frontal Impact Protection

## NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 2.50" OUTLET WITH 2.50" PIPING AND SWIVEL LOCATED ON TOP BUMPER LEFT SIDE
- SHORELINE RECEPTACLE WITH KUSSMALL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED PER ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE THROUGH WINDOW
- THREE ADJUSTABLE SHELVES LOCATED PER ORDER
- ONE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER
- PEGBORD ON BACK WALL PER SHOP ORDER
- PLUMBING FOR FUTURE FOAM SYSTEM

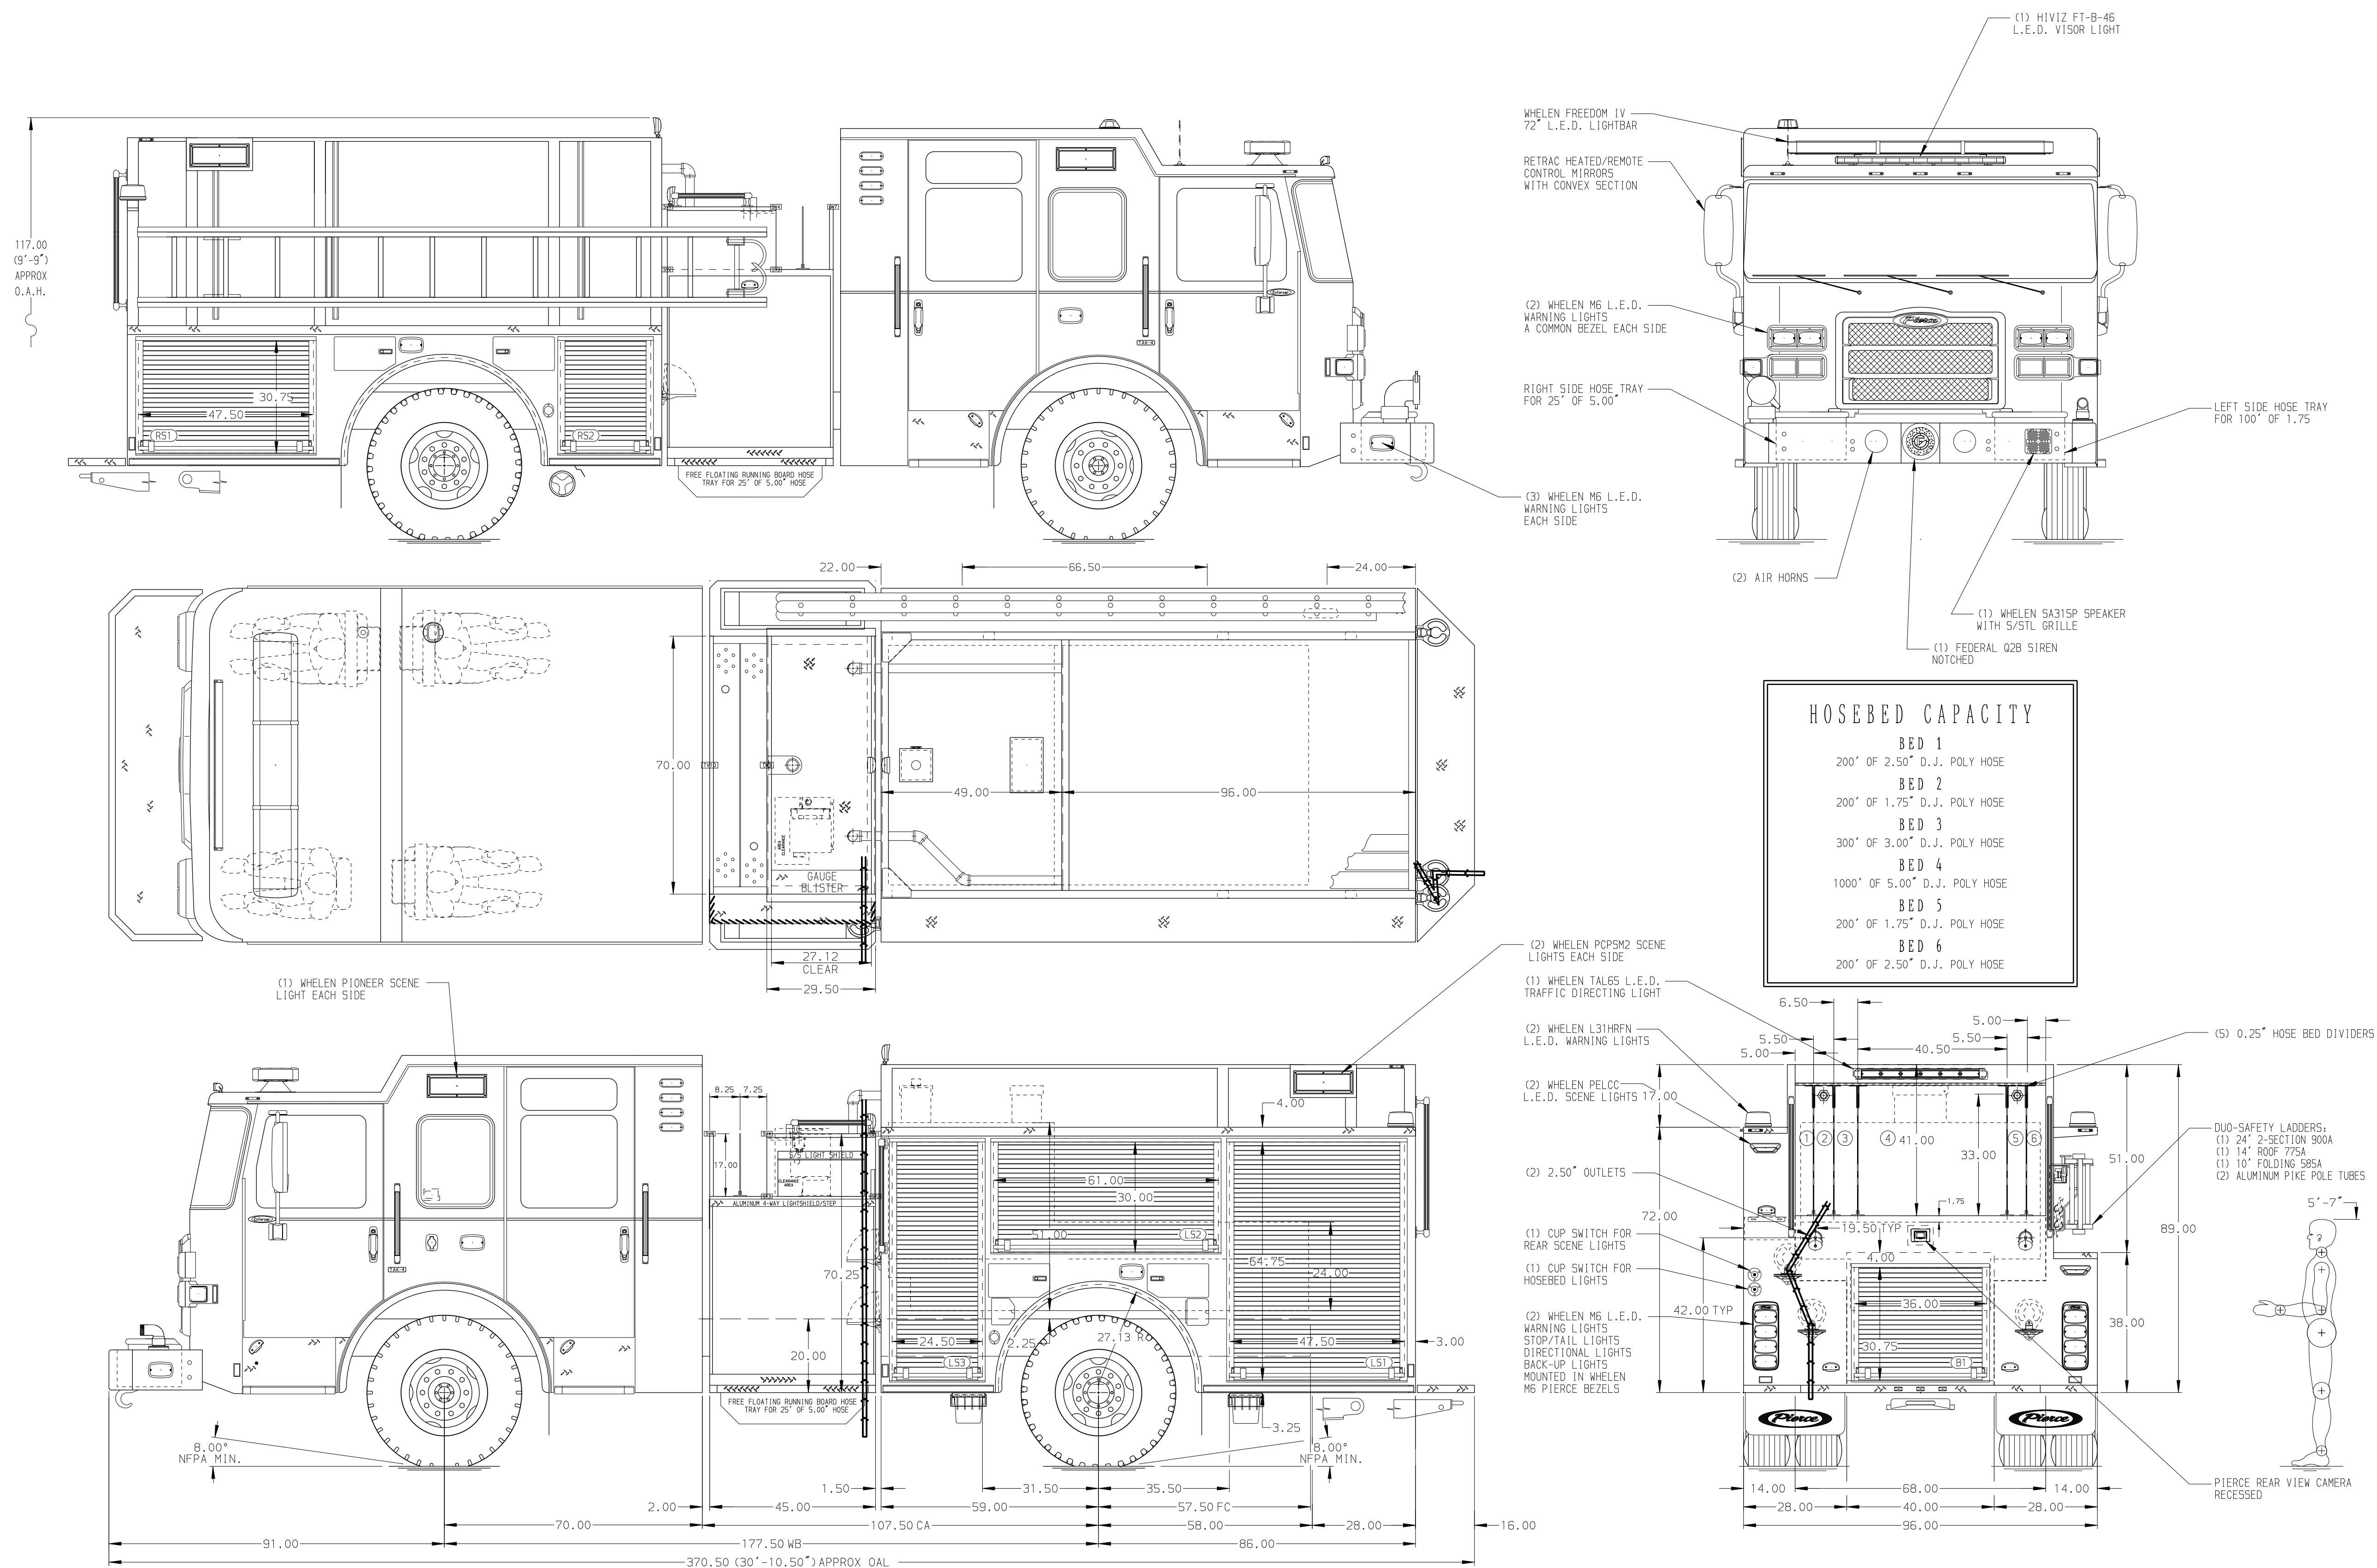

CUSTOMER APPROVAL				Pierce MANUFACTURING INC.		JOB NO.	41372
APPROVED BY: _____						SCALE	DATE
DATE: _____						1:24	
CHASSIS DATA				TITLE	Pierce Pumper Approval Drawing		
MAKE				FOR	Wilkes-Barre		
PIERCE				DWG NO.	41372AD		
MODEL				SHEET NO.	1 OF 1		
REV	DATE	BY	CH	ENFORCER			
04APR24		MMF	AST				
01APR24		MMF	AST				