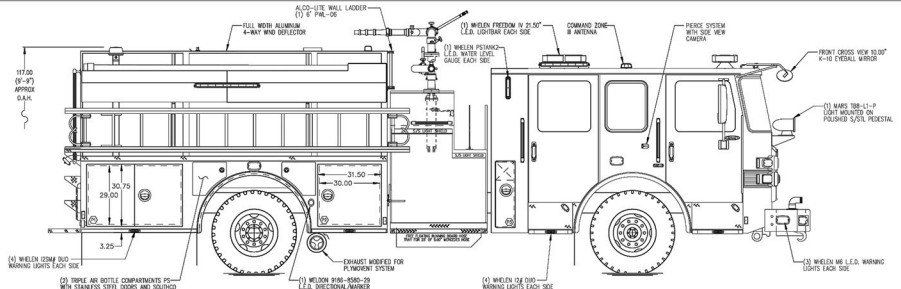


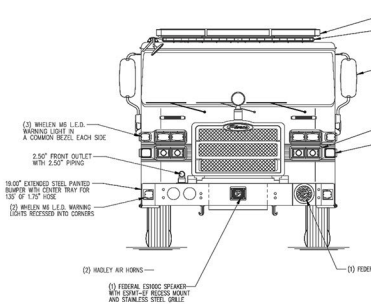


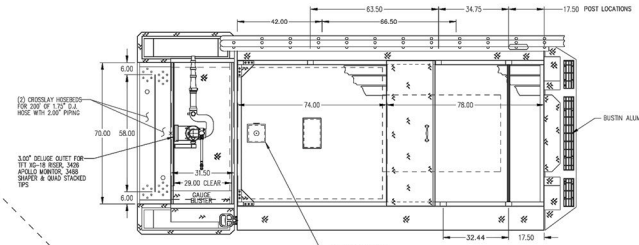


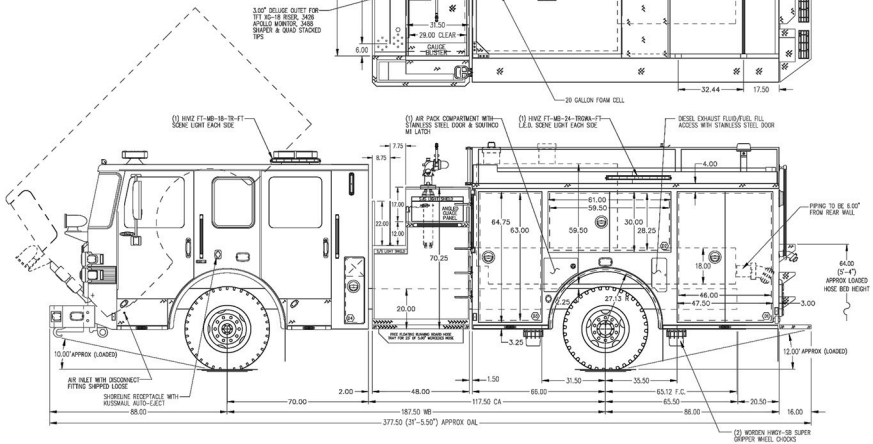


HOSEBED CAPACITIES
1. 200' OF 1.75" D.J. HOSE (SINGLE STACK)
2. 300' OF 1.75" D.J. HOSE (DOUBLE STACK)
3. 1200' OF 5.00" MERCEDES MEGA FLOW HOSE (4 ROWS)
4. 400' OF 3.00" D.J. HOSE (DOUBLE STACK)
5. 200' OF 2.00" D.J. HOSE (SINGLE STACK)

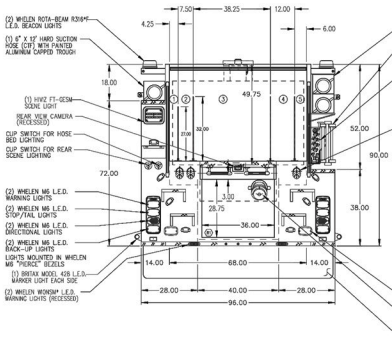


ALUMINUM BODY MAXIMUM O.A.L. 376.00" MAXIMUM O.A.H. 117.00" SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. KUSSMAUL BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
3. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
4. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
5. REVERSED HINGED DOOR ON COMPARTMENT D3
6. L.E.D. STRIP LIGHTS TO BE INSTALLED IN CARGO AREA
7. ONE 15/20A 120V DUPLEX RECEPTACLE LOCATED IN CAB

| REV | DATE | BY | CH |
|---|---|---|---|
| 200CT23 | KRG | – | |
| 120CT23 | KRG | – | |

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER
DWG NO.: PRELIMINARY PRINT ONLY

Pierce MANUFACTURING INC.

TITLE: 1500-D-1000P, 980G WTR, 20G FOAM, 152" FH DS/LOW PS SIDE CONTROL, DELUGE, PS LADDER BRACKETS
FOR: UNION FIRE COMPANY NO. 1 OXFORD, PENNSYLVANIA

| | |
|---|---|
| PROPOSAL | 829 |
| SCALE | 1:24 |
| DATE | |
| DRAWN BY | KRG |
| DATE | 13JUNE2023 |
| CHECKED BY | N/A |
| | N/A |
| SHEET SIZE | D |
| SHEET NO. | 1 OF 1 |