
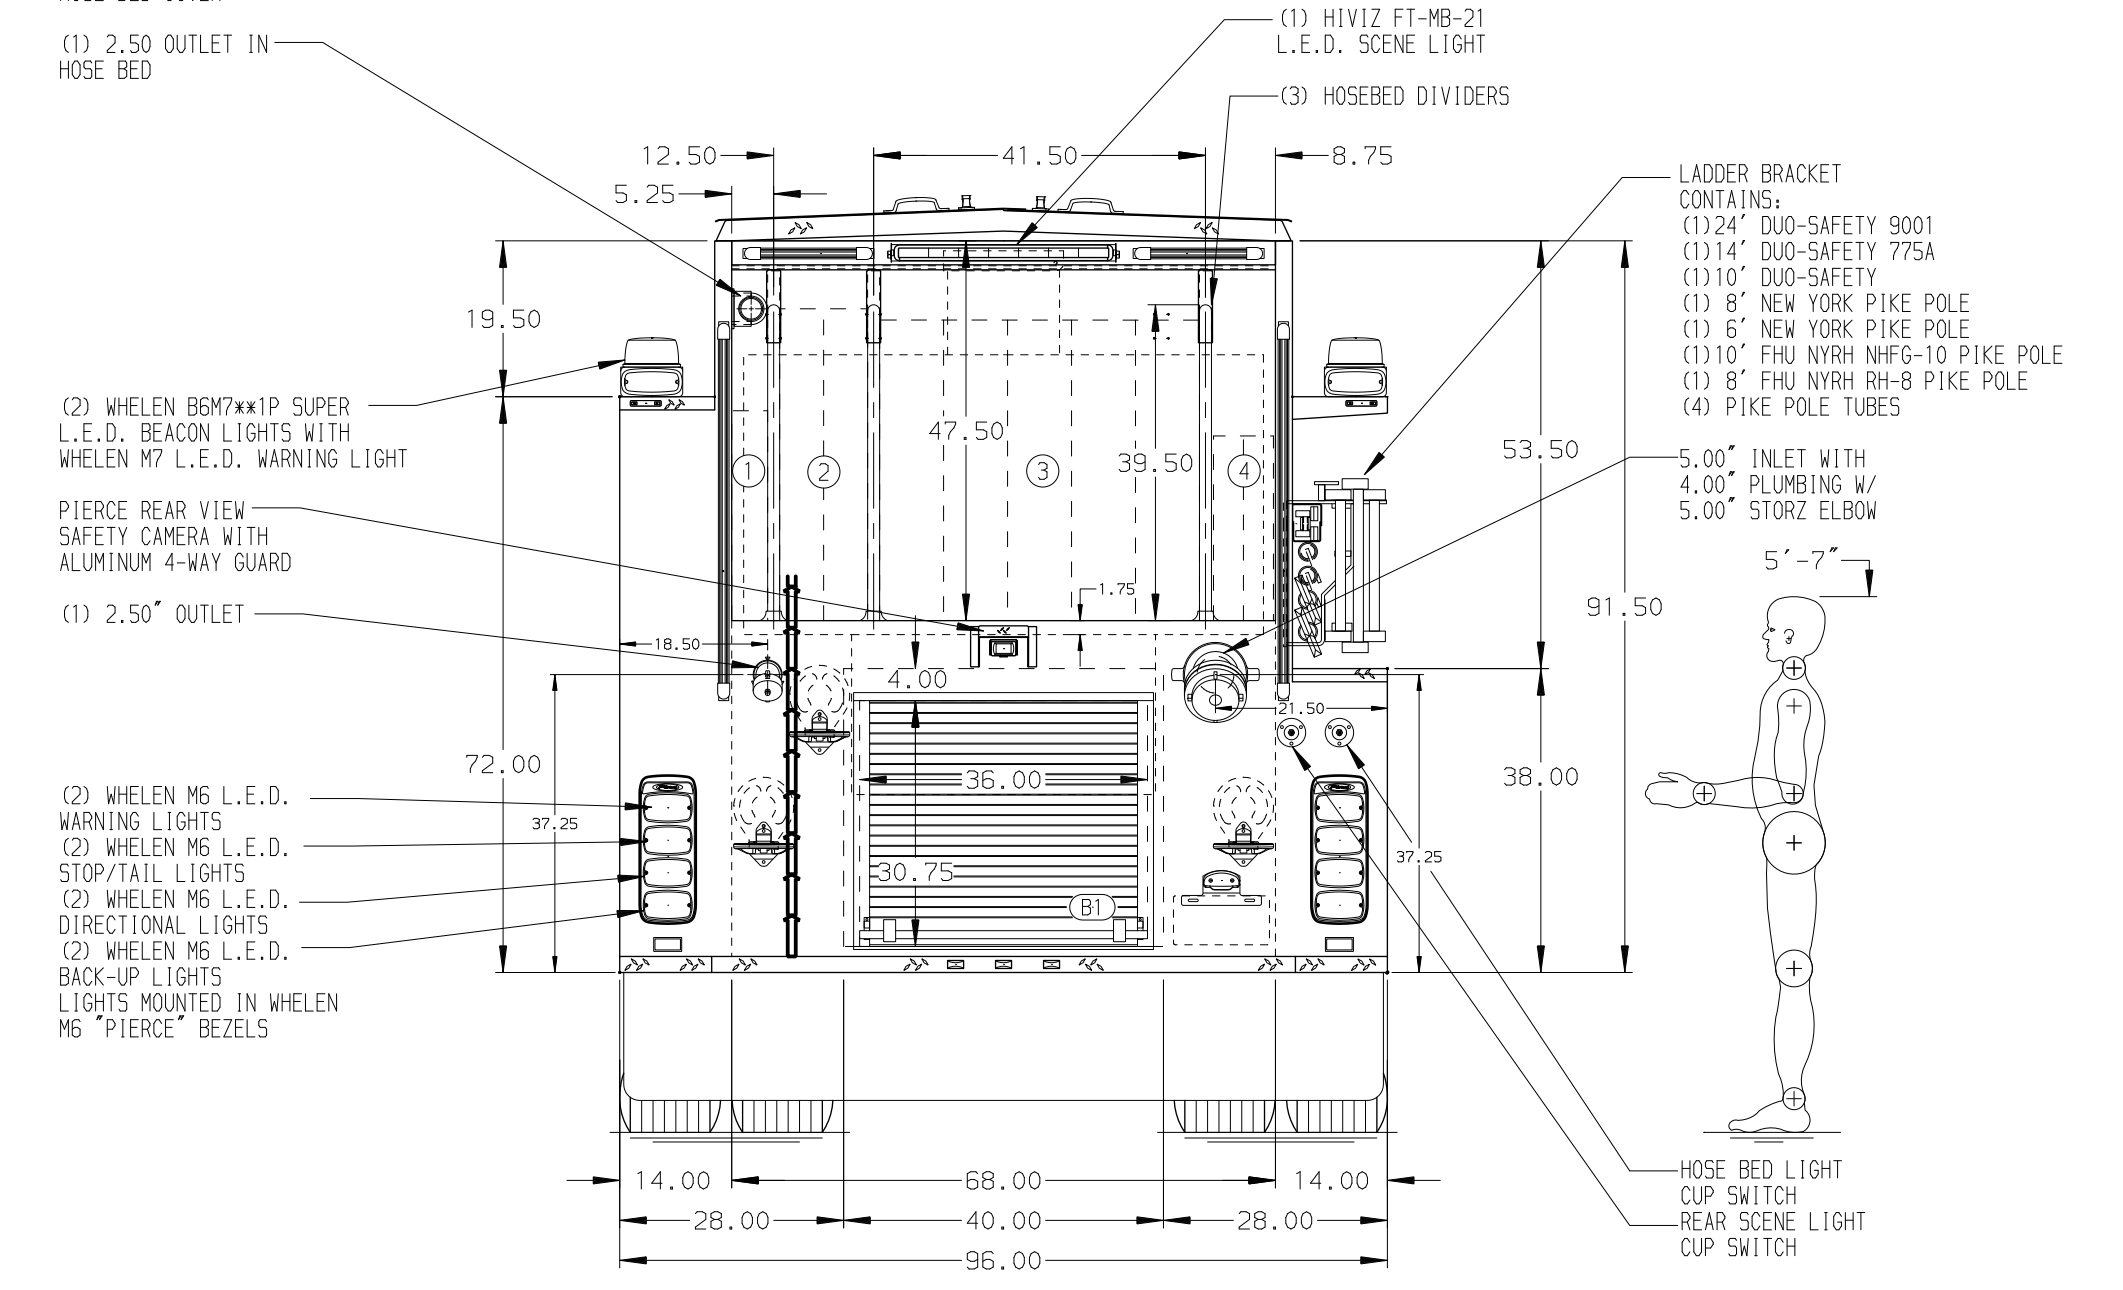


- HOSEBED CAPACITIES
- ① - 200' OF 2.50" D.J. POLY HOSE (SINGLE STACK)
 - ② - 600' OF 3.00" D.J. POLY HOSE (DOUBLE STACK)
 - ③ - 1200' OF 5.00" L.D.H. CLOTH HOSE
 - ④ - 400' OF 2.00" D.J. POLY HOSE (DOUBLE STACK)

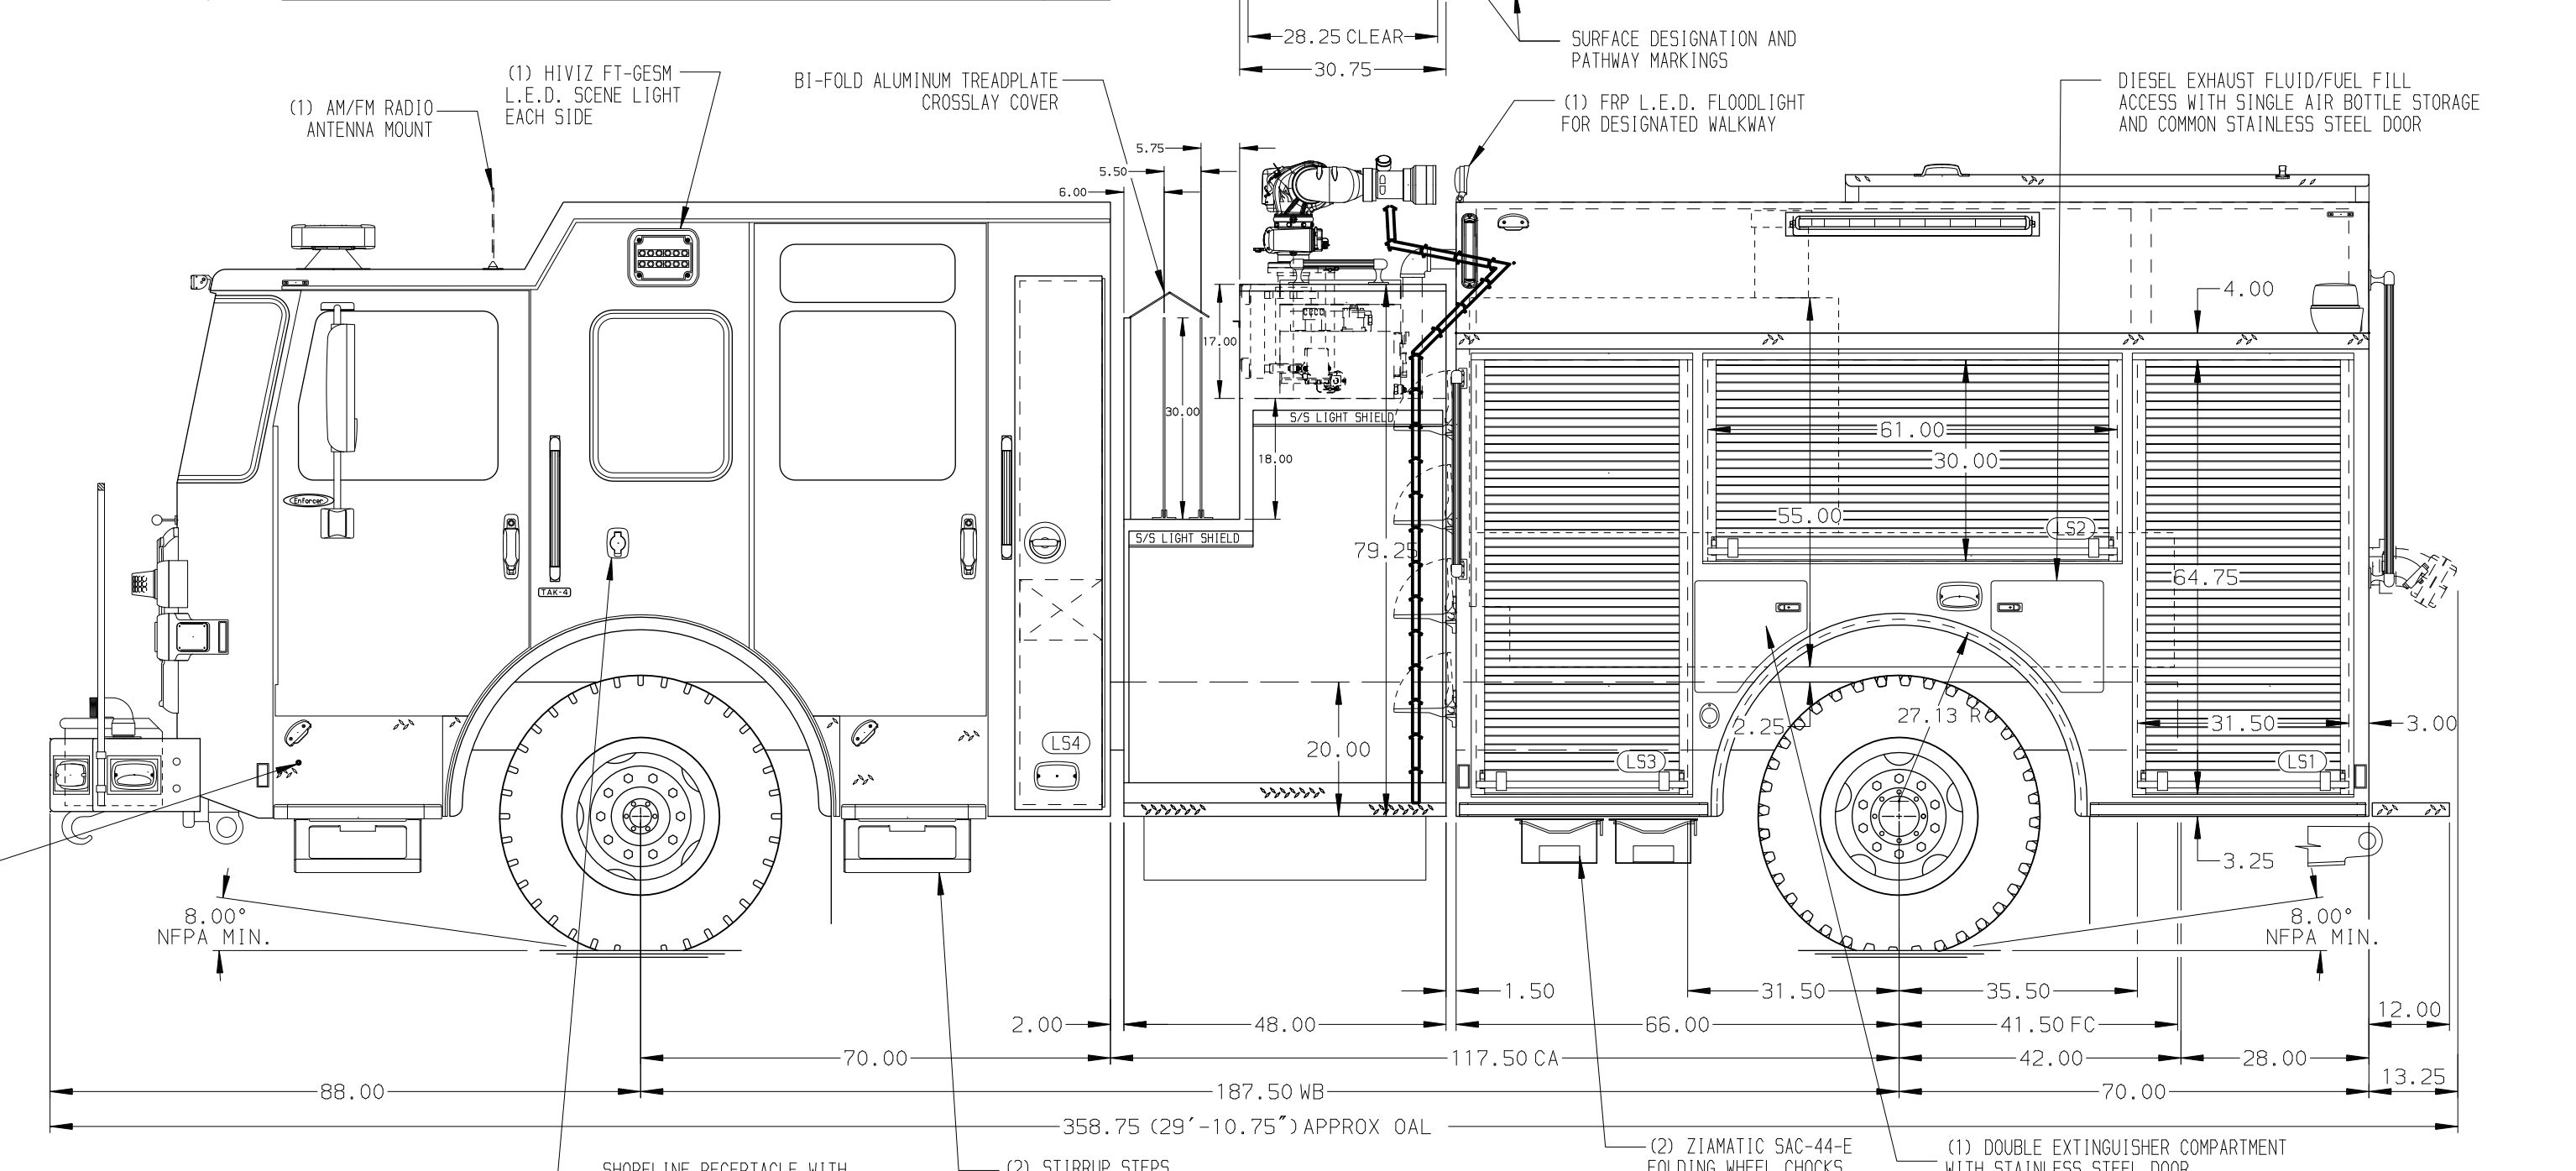

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
 MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
4. SEVEN DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED PER ORDER
5. TWO FULL WIDTH/DEPTH ADJUSTABLE SHELF LOCATED PER ORDER
6. CIRCUIT BREAKER PANEL LOCATED PER ORDER
7. ONE FULL WIDTH/DEPTH FIXED SHELF LOCATED PER ORDER
8. PEGBOARD ON BACK OF COMPARTMENTS PER ORDER
9. FIVE 120V RECEPTACLES LOCATED PER ORDER

		JOB NO.	37296
		SCALE	DATE
CHASSIS DATA TITLE 2000-D-750P, 136" PUMPER BODY, LOW SIDE PS, (3) XLAYS REAR INLET, GENERATOR, CORD REEL, LDRS ON BRACKETS	FOR RIVERS EDGE VOLUNTEER FIRE DEPARTMENT BRADDOCK, PENNSYLVANIA	DRAWN BY	09FEB22
		CHECKED BY	18FEB22
REV DATE BY CH ENFORCER	DWG NO. 37296AD	SHEET SIZE	SHEET NO.
		D	1 OF 1