

**PUMPER  
BODY**

Medium Aluminum 2nd Gen Pumper

**CHASSIS**

Enforcer Chassis

**CHASSIS  
AXLE, FRONT, CUSTOM**

20,000 Lb Dana Axle

**AXLE, REAR**

27,000 Lb Dana Axle

**ENGINE**

500 HP Cummins X12 Engine

**TRANSMISSION**

Allison 5th Gen, 4000 EVS P

**BUMPER**

19" Extended Stainless Steel

**CAB**

7010 Enforcer Cab

**BODY  
WATER TANK**

750 Gallon New York Style Water Tank

**COMPT, PUMPER, REAR**

30.75" FF RollUp Rear Compt

**COMPT, PUMPER, LEFT SIDE**

152" Lap Full Height Front & Rear FDLER

**COMPT, PUMPER, RIGHT SIDE**

152" Lap Low FDLER

**FIRE SUPPRESSION  
PUMPHOUSE**

45" Control Zone Side Mount

**PUMP**

1500 GPM Waterous CXC20

**CROSSLAYS, 1.50"**

(2) 1.50" Standard Capacity

**CROSSLAYS, 2.50"**

2.50" Crosslay Not Required

**SPEEDLAYS**

SpeedLays Not Required

**GENERATOR**

Generator Not Required

**Foam System**

Foam System Not Required


**Foam Cell**

Foam Cell Not Required

Side Roll and Frontal Impact Protection

**NOTE**  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED ON TOP BUMPER LEFT SIDE
- SHORELINE RECEPTACLE WITH KUSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING AND COVER ON THE DRIVER SIDE OF CAB
- BATTERY CHARGER LOCATED IN COMPARTMENT PER SHIP ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE THROUGH WINDOW
- AUTOMATIC TIRE CHAINS

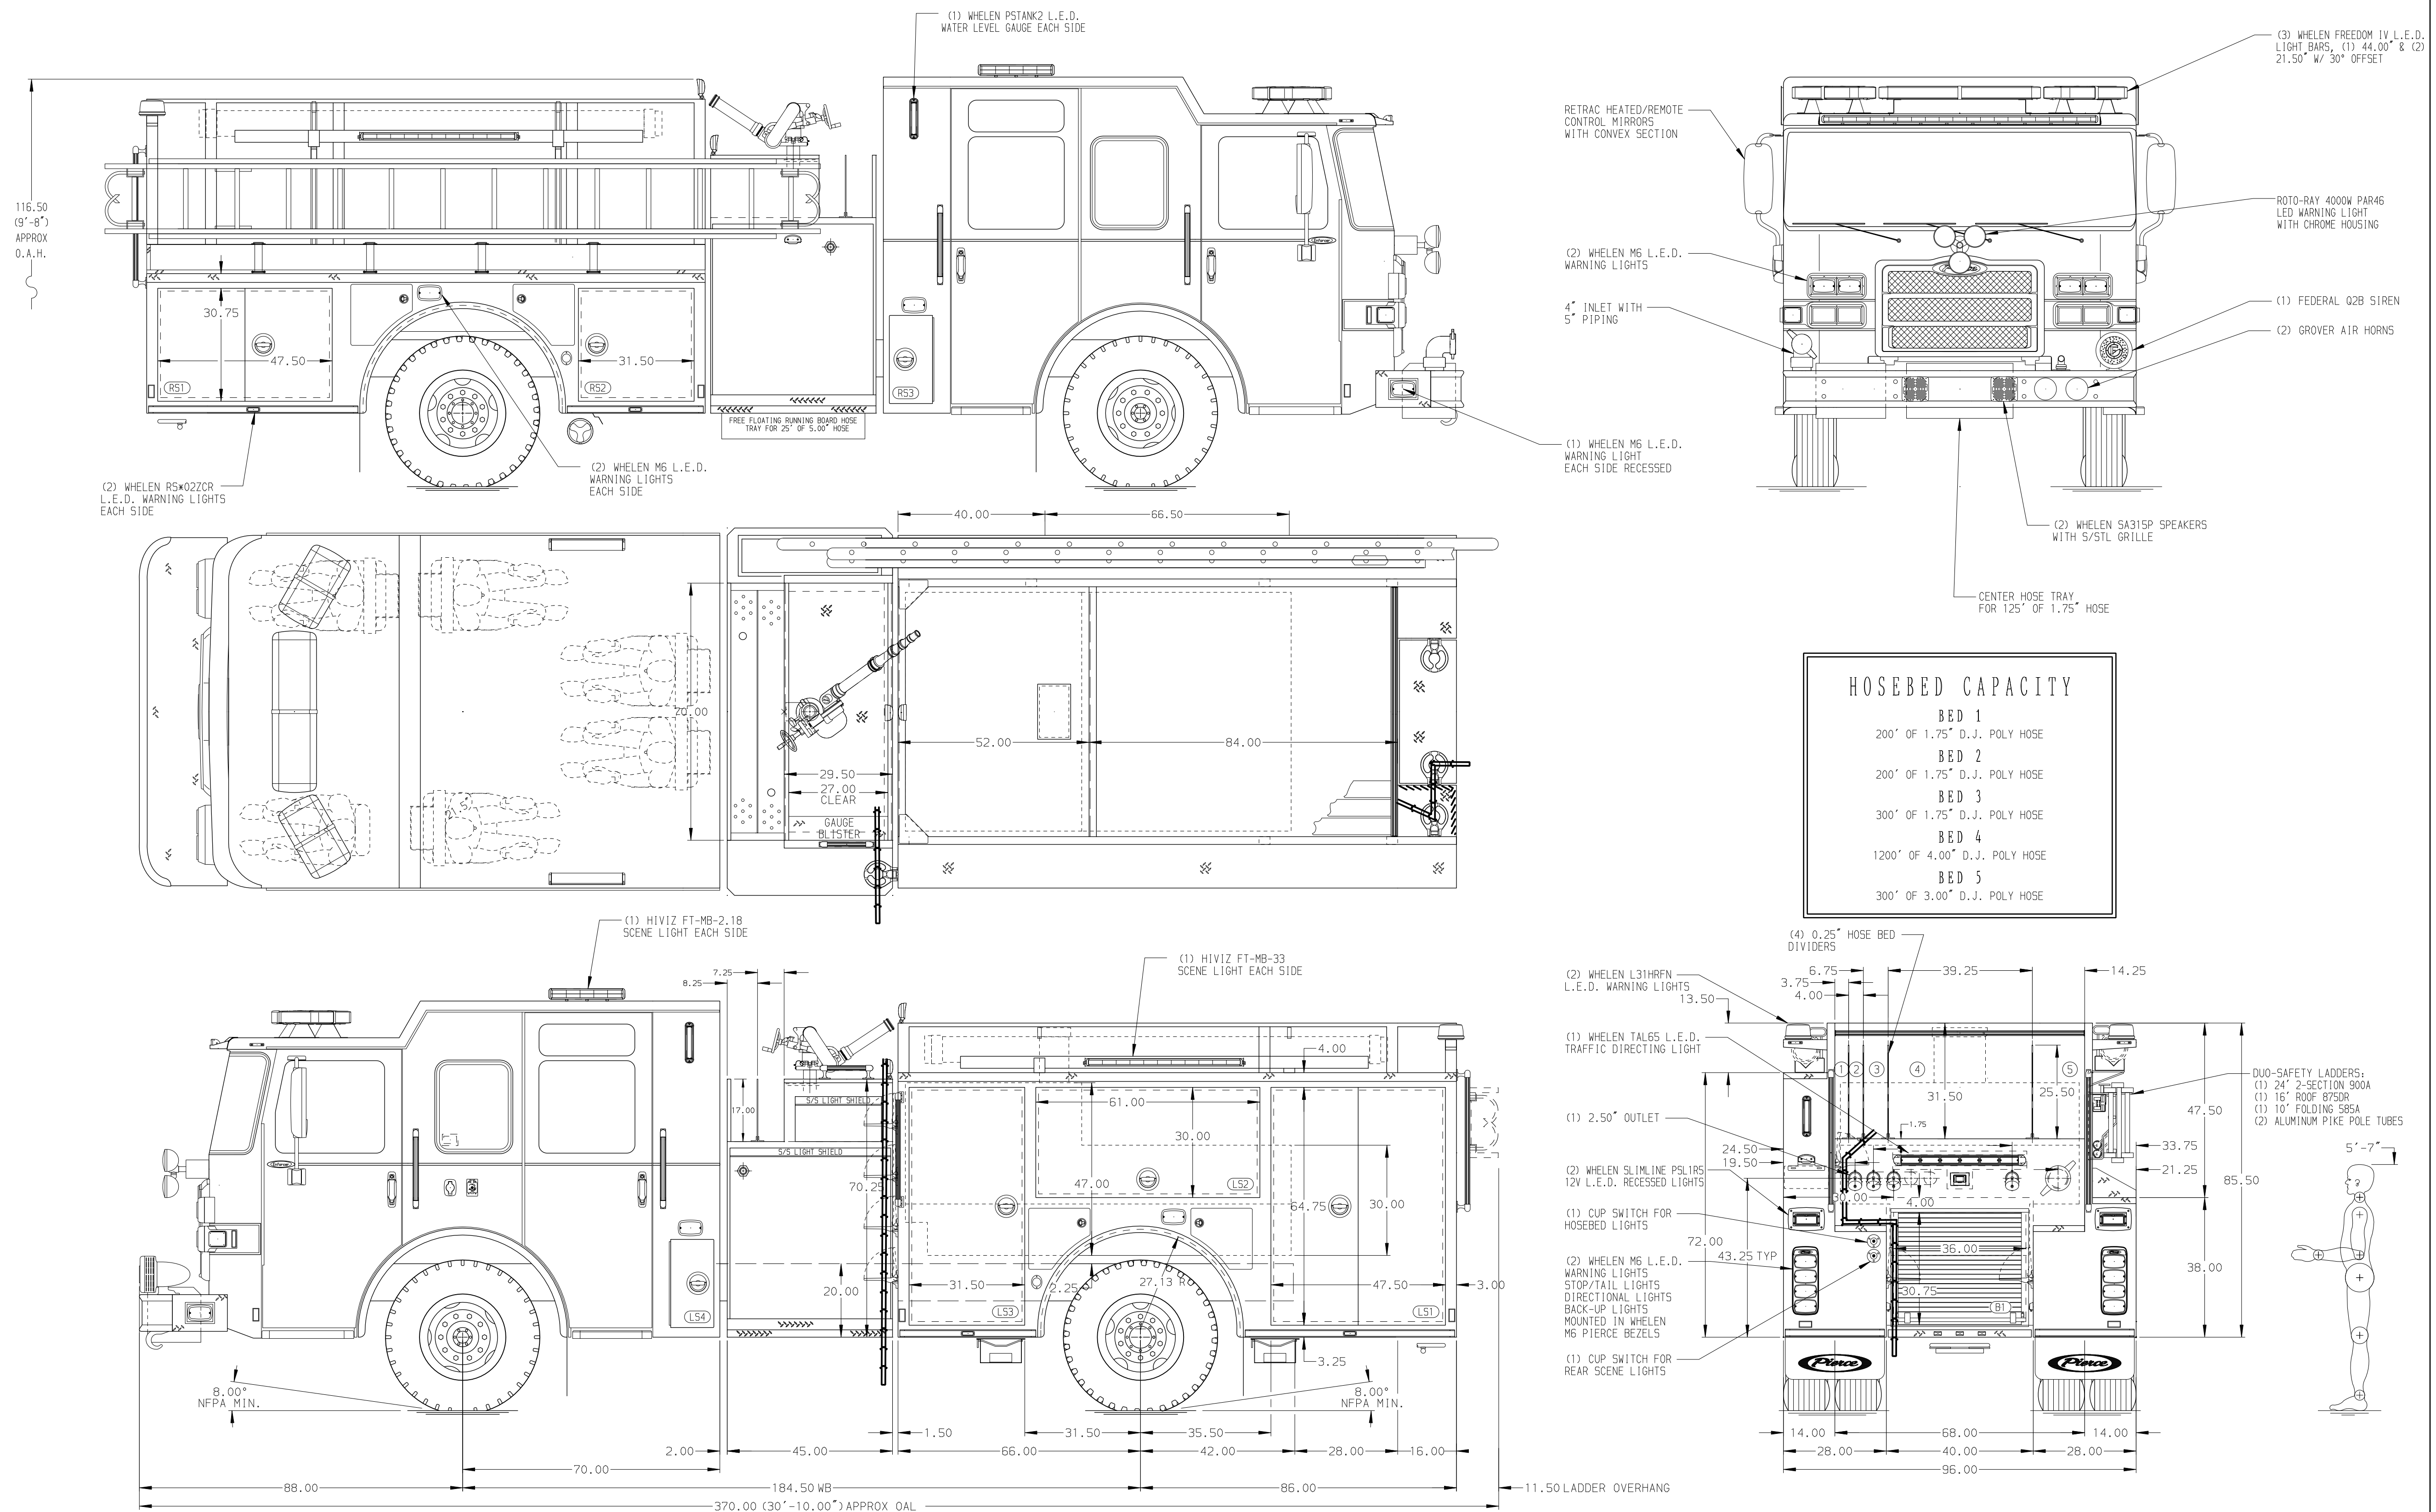

**CUSTOMER APPROVAL**

APPROVED BY: \_\_\_\_\_  
DATE: \_\_\_\_\_



JOB NO. 37393

SCALE 1:24 DATE

DRAWN BY MMF 19JAN22

CHECKED BY COL 21JAN22

SHEET SIZE D SHEET NO. 1 OF 1

CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing
MAKE	FOR	Slippery Rock Fire and Rescue Team
PIERCE	DWG NO.	37393AD
MODEL		
ENFORCER		

37393AD