

PUMPER BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS AXLE, FRONT, CUSTOM

19,500 Lb TAK-4 Axle

AXLE, REAR

27,000 Lb Dana Axle

ENGINE

450 HP Cummins X10 Engine

TRANSMISSION

Allison 6th Gen, 3000 EVS P

BUMPER

22" Extended Painted Steel

CAB

7000 Enforcer Cab

BODY

TOTAL TANK CAPACITY

1000 Gal/Lon New York Style Poly Tank

WATER CAPACITY

1000 Gallons of Water

FOAM CELL

Foam Cell Not Required

COMPT, PUMPER, REAR

28.75" FF Rollup Rear Compt

COMPT, PUMPER, LEFT SIDE

152" Lap Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE

152" Lap Low FDLER

FIRE SUPPRESSION PUMPHOUSE

45" Control Zone Side Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

SpeedLays Not Required

GENERATOR

Generator Not Required

FOAM SYSTEM


Foam System Not Required

SAFETY

Side Roll and Frontal Impact Protection

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED ON TOP BUMPER LEFT SIDE
- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE STEPWELL
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED PER ORDER
- BATTERY CHARGE INDICATOR LOCATED ON DRIVER SEAT RISER
- TWO ADJUSTABLE SHELVES LOCATED PER ORDER
- HANNAY MODEL 5BEF 24-28-29 BOOSTER REEL FOR 200' OF 1.00" HOSE IN RIGHT SIDE OF CARGO AREA ABOVE THE PUMP

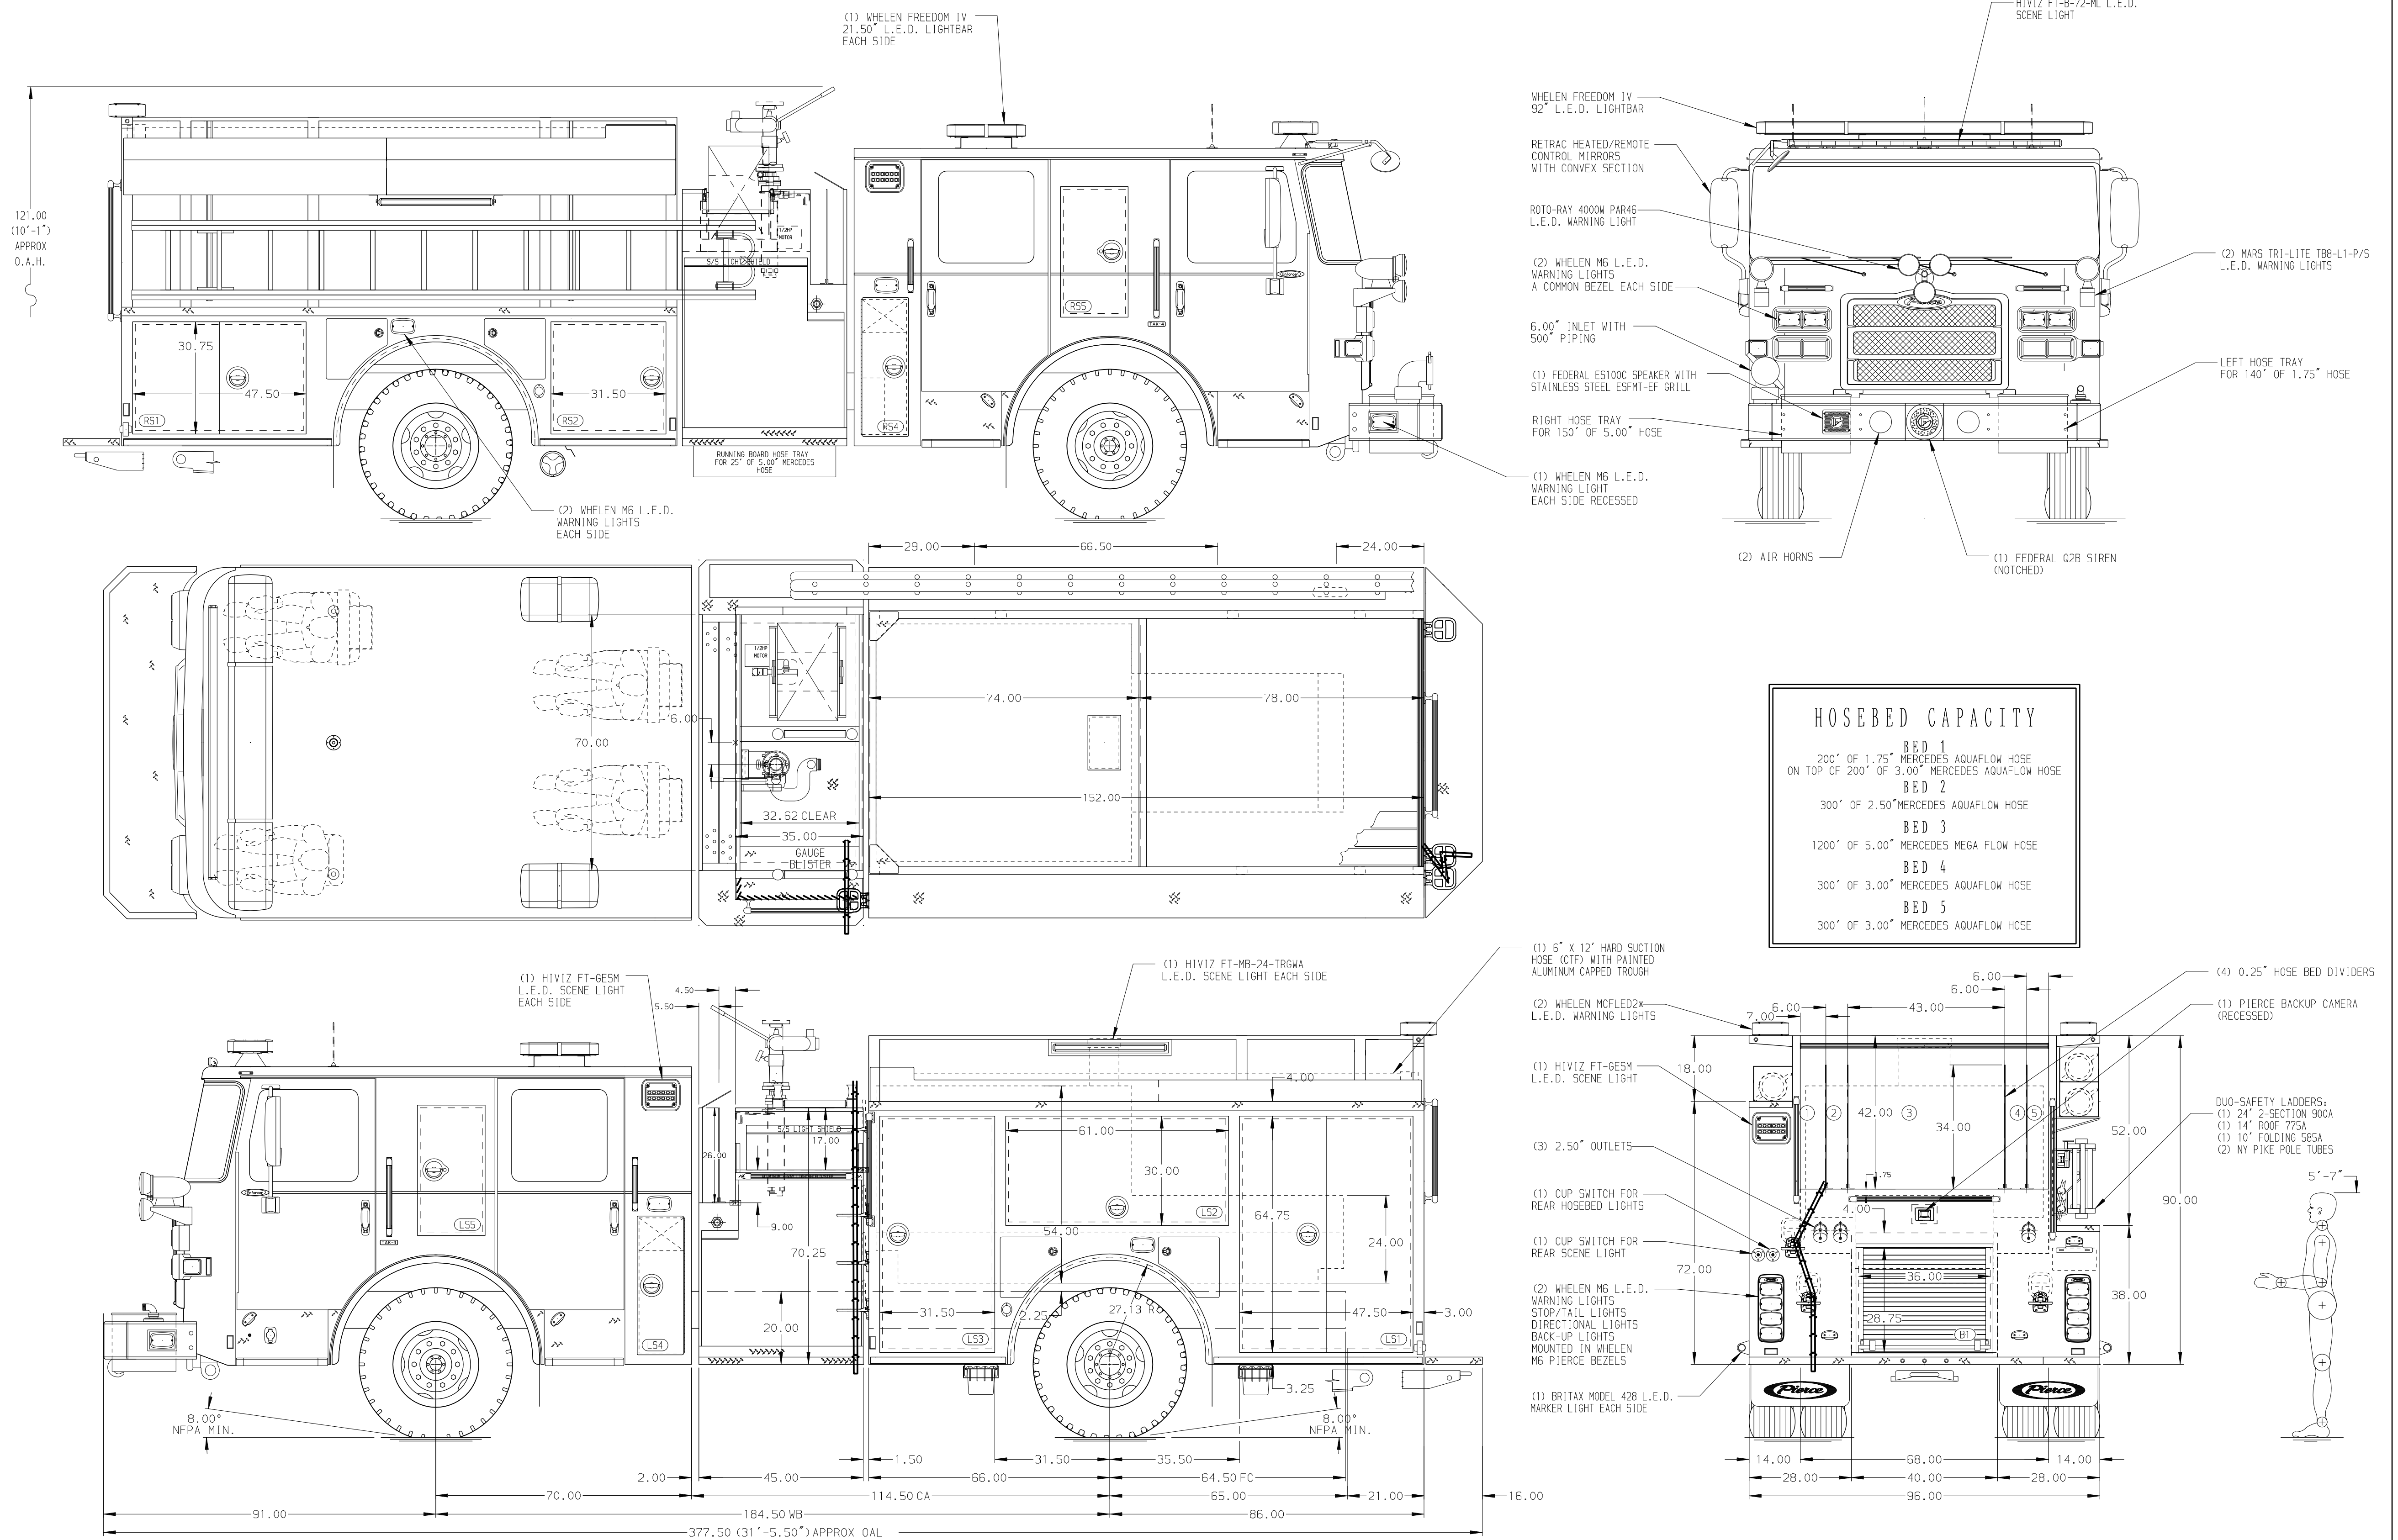

MANUFACTURING INC.	JOB NO.	39746
	SCALE	DATE
Pierce Pumper Approval Drawing	DRAWN BY	MMF
	CHECKED BY	AMI
FOR	Manheim Township Fire Rescue	SHEET NO.
DWG NO.	39746AD	1 OF 1

REV	DATE	BY	CH	ENFORCER
210CT24	MMF	COS		CHASSIS DATA
19SEP24	MMF	COS		PIERCE
20AUG24	MMF	COS		MODEL
07AUG24	MMF	COS		ENFORCER
24JUN24	MMF	COS		