



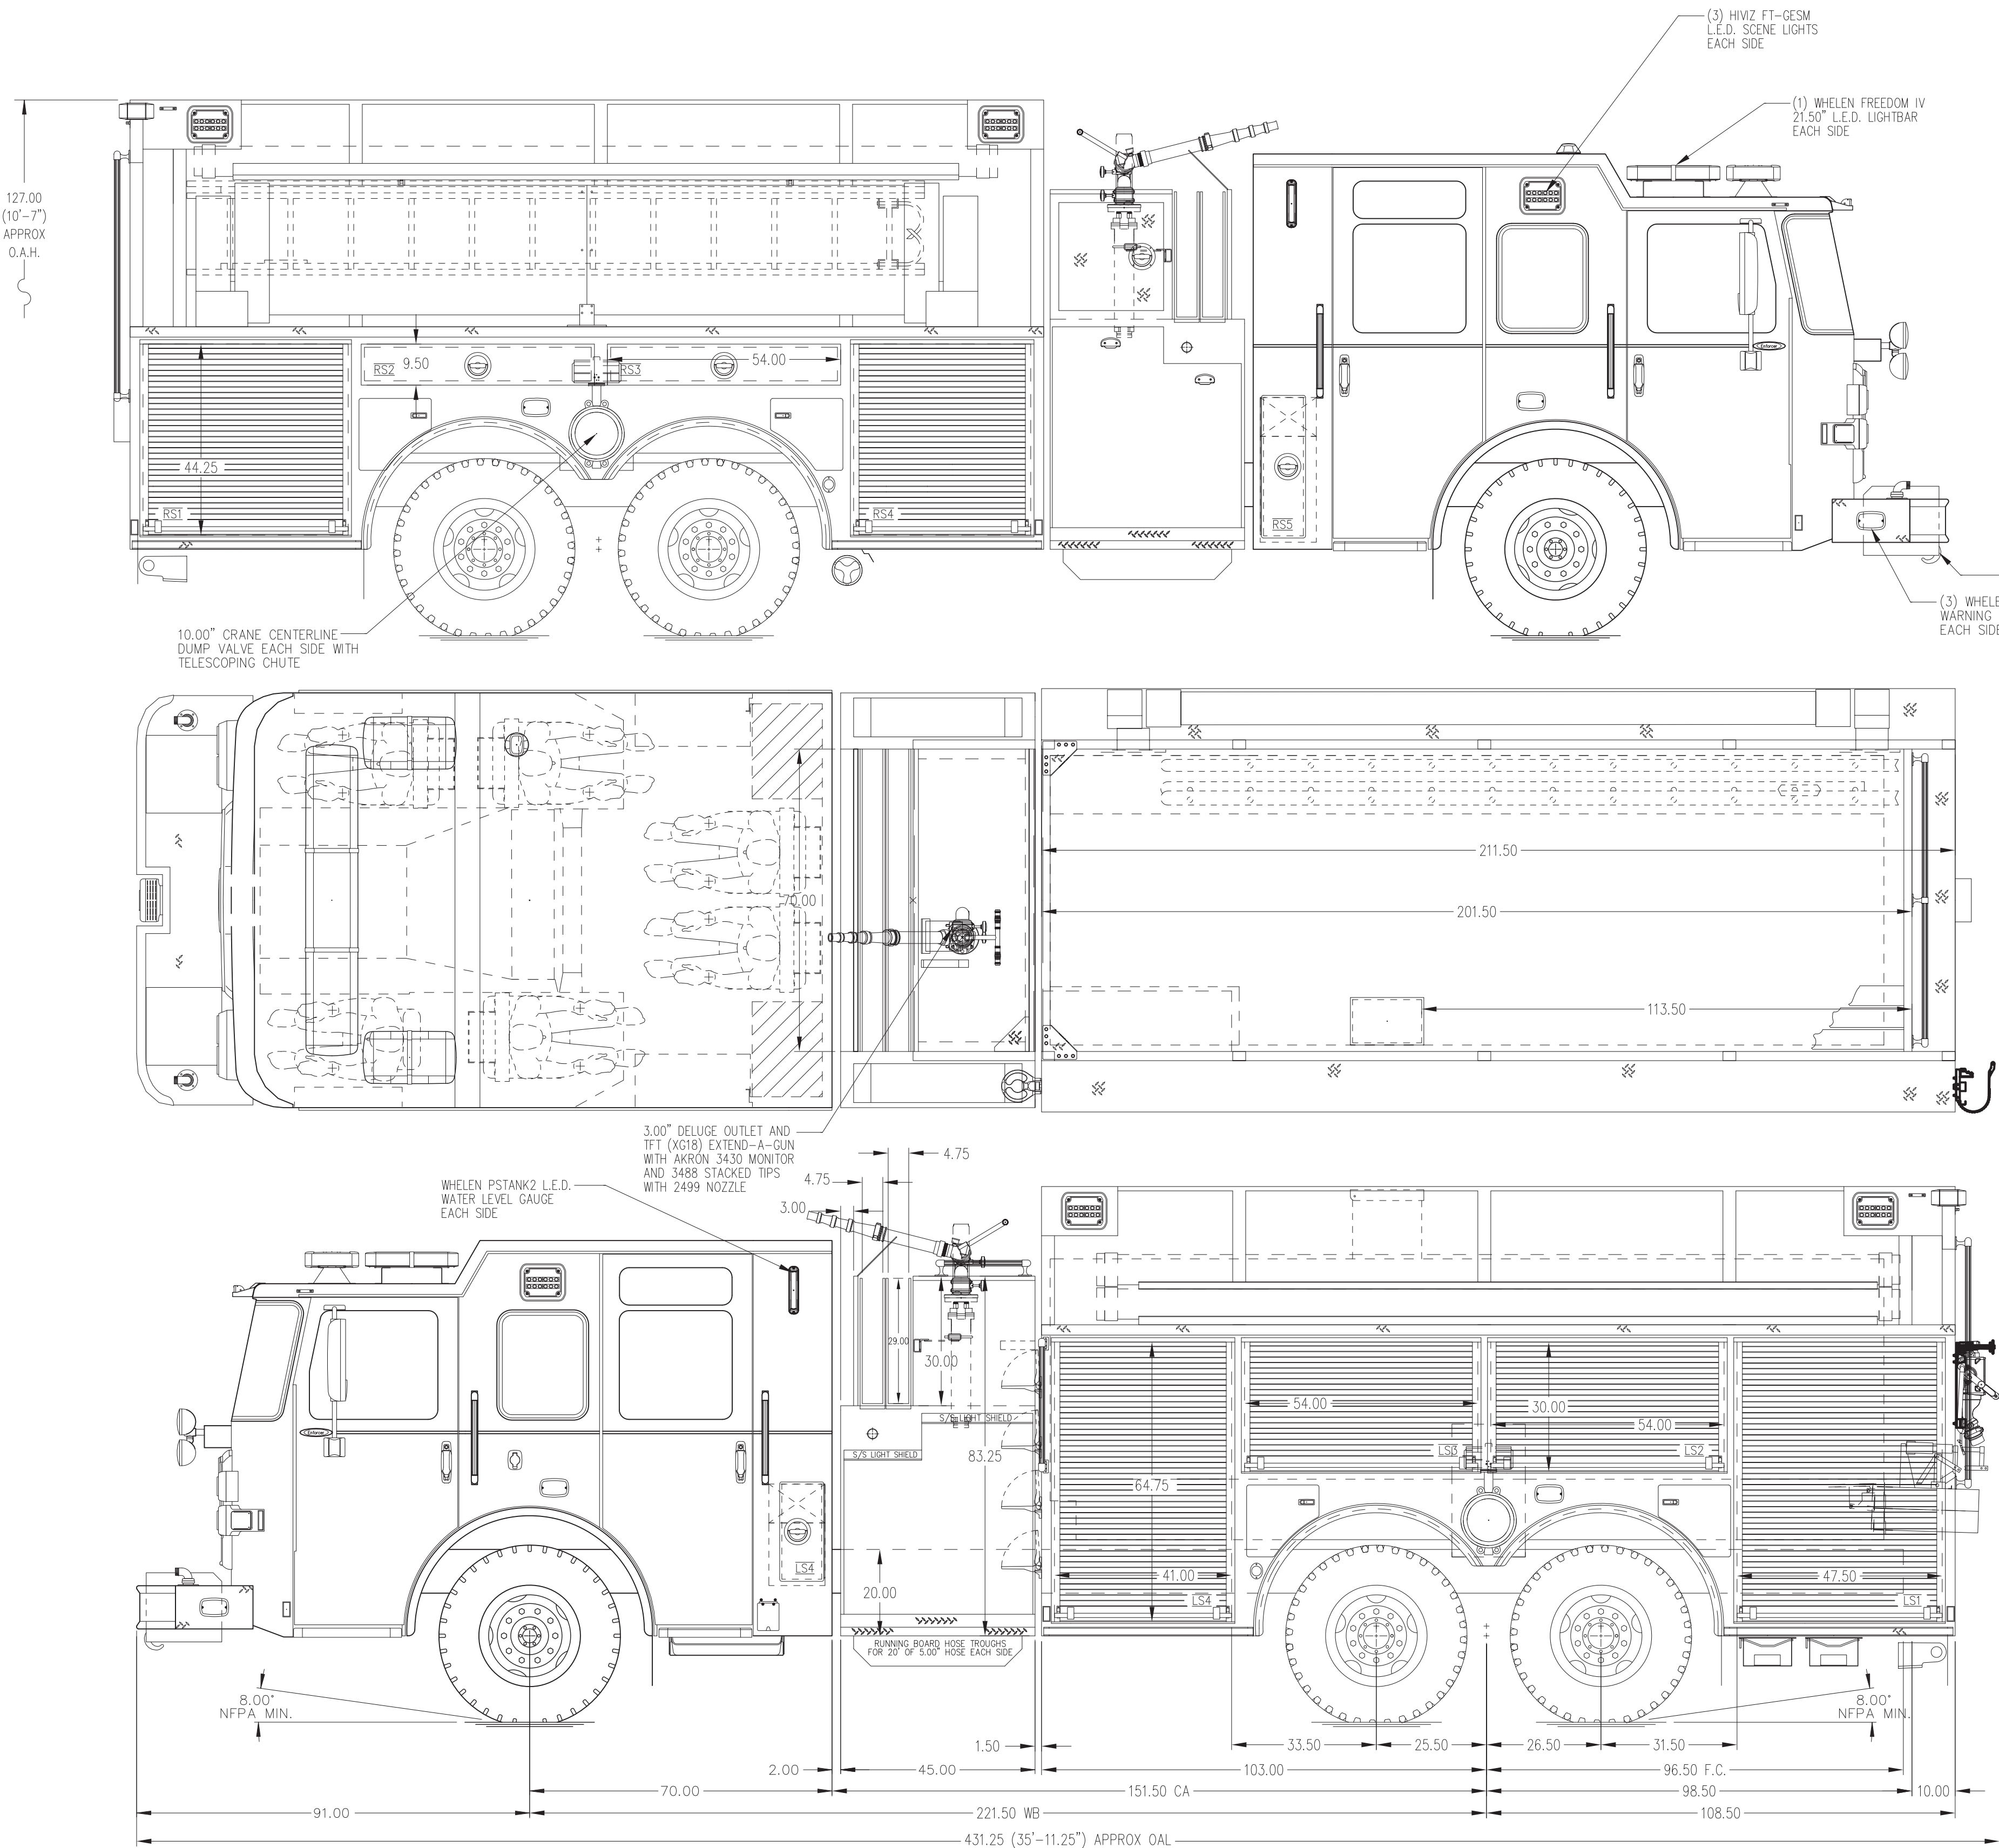

- HOSEBED CAPACITIES
- ① - 400' OF 3.00" FOR A BUTZ FIRE
 - ② - 1000' OF 5.00"
 - ③ - 300' OF 2.50"

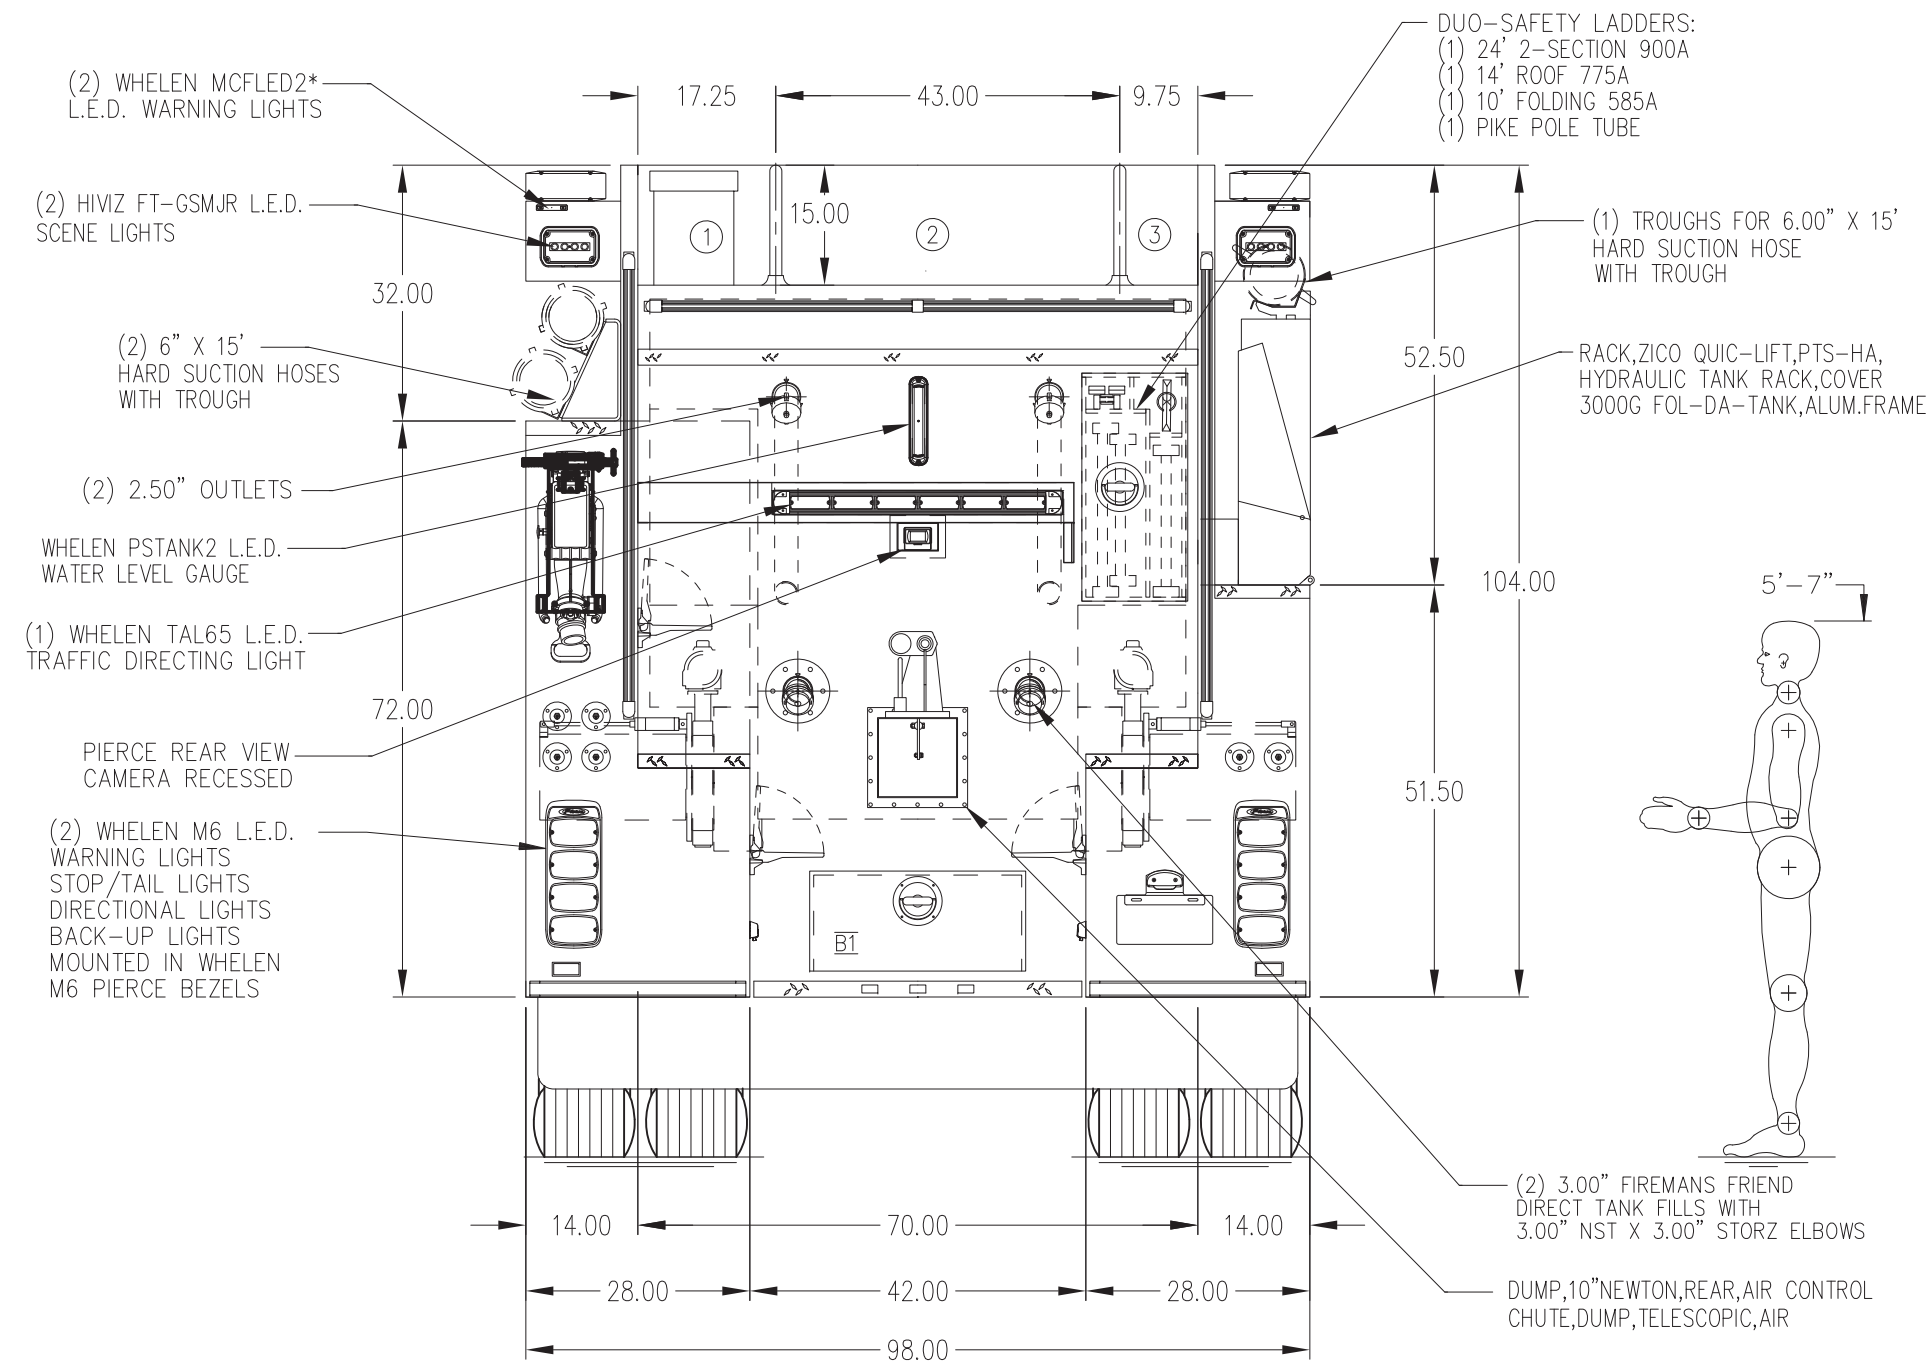

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
2. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPMWELL
3. BATTERY CHARGER LOCATED PER ORDER
4. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER

REV	DATE	BY	CH	ENFORCER
▽	020CT23	KRG	-	CHASSIS DATA
▽	06SEP23	KRG	-	MAKE
▽	01SEP23	KRG	-	PIERCE
▽			-	MODEL

TITLE	2000-D-2500 GAL. POLY, 211" DRY SIDE TANKER		PROPOSAL	856
	(2) CROSSLAYS, BOOSTER REEL, DELUGE		SCALE	DATE
	FIVEPOINTVILLE FIRE COMPANY		DRAWN BY	16JUN2023
	DENVER, PA		CHECKED BY	N/A
	PRELIMINARY PRINT ONLY		SHEET SIZE	SHEET NO.
DWG NO.			D	1 of 1