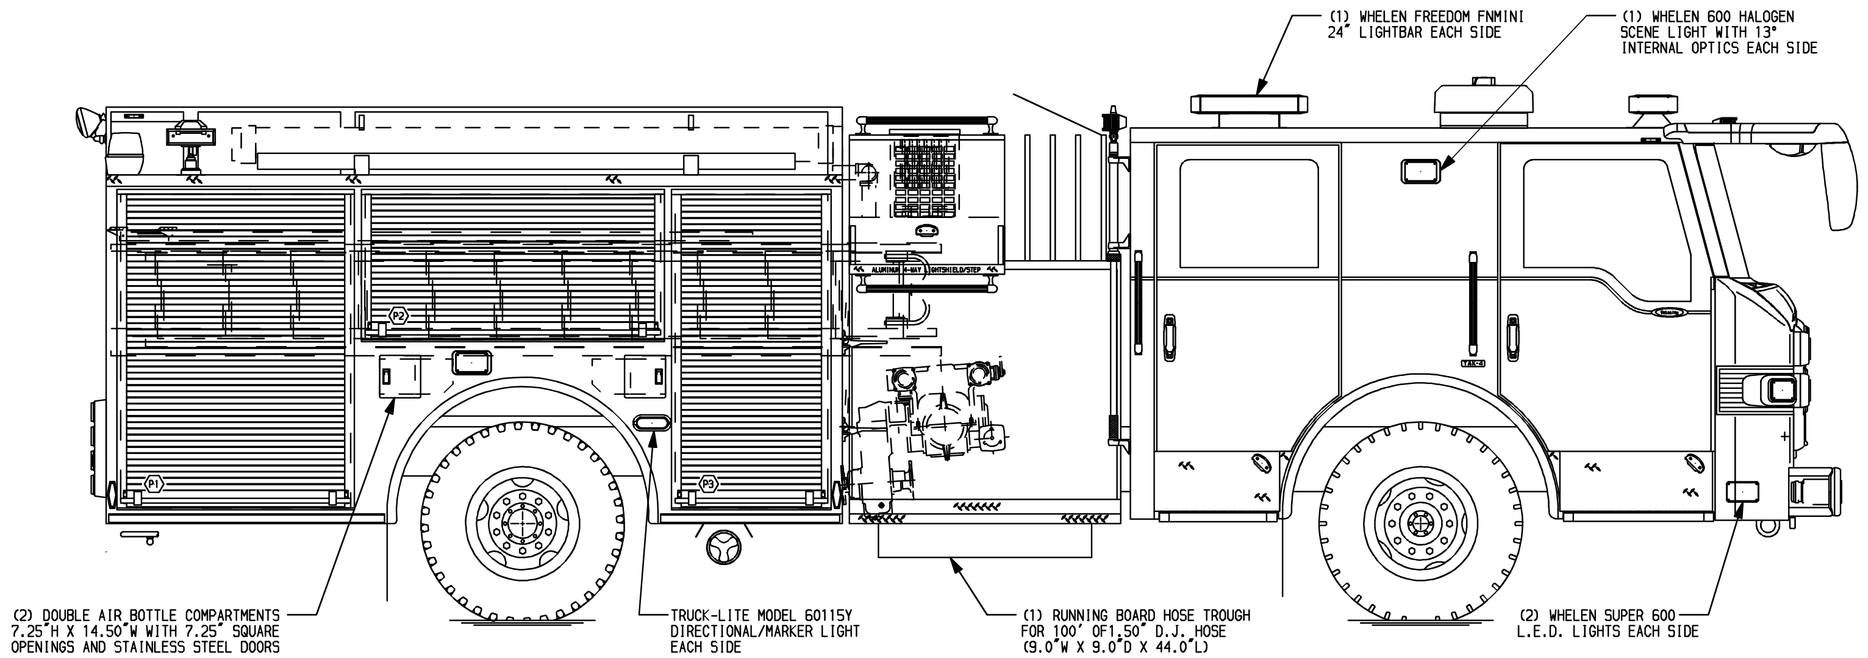

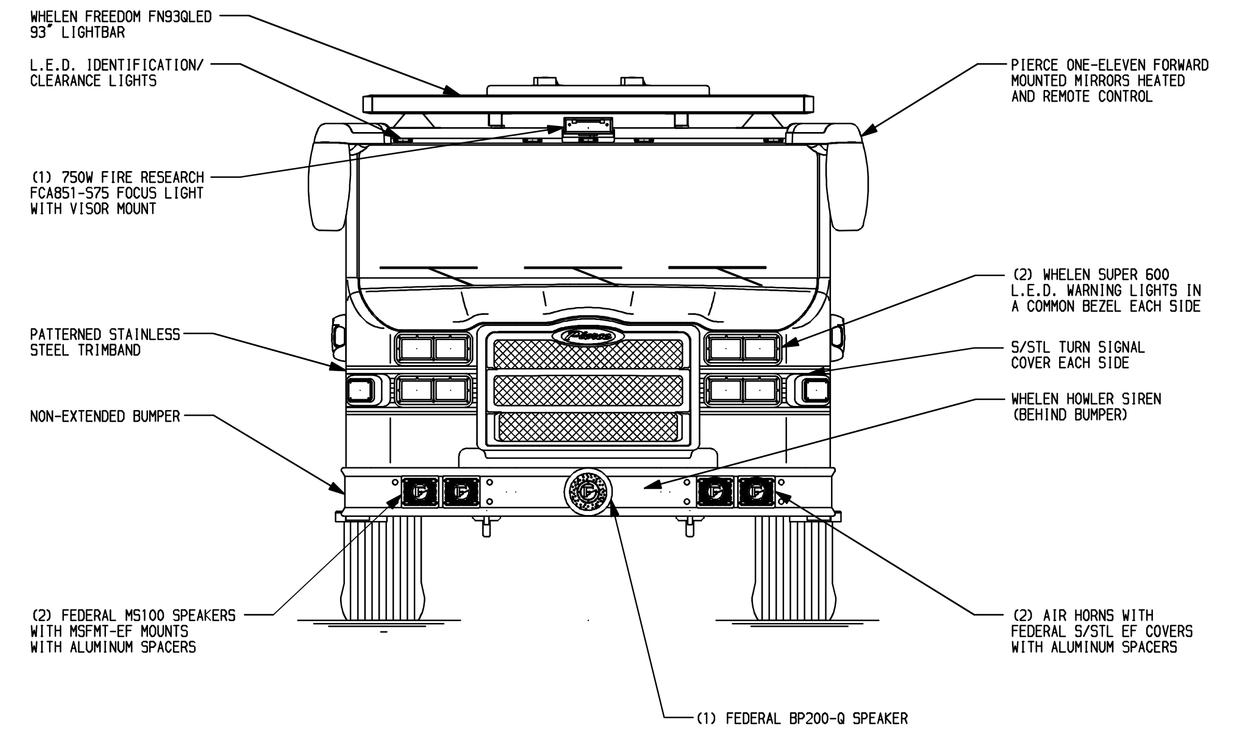

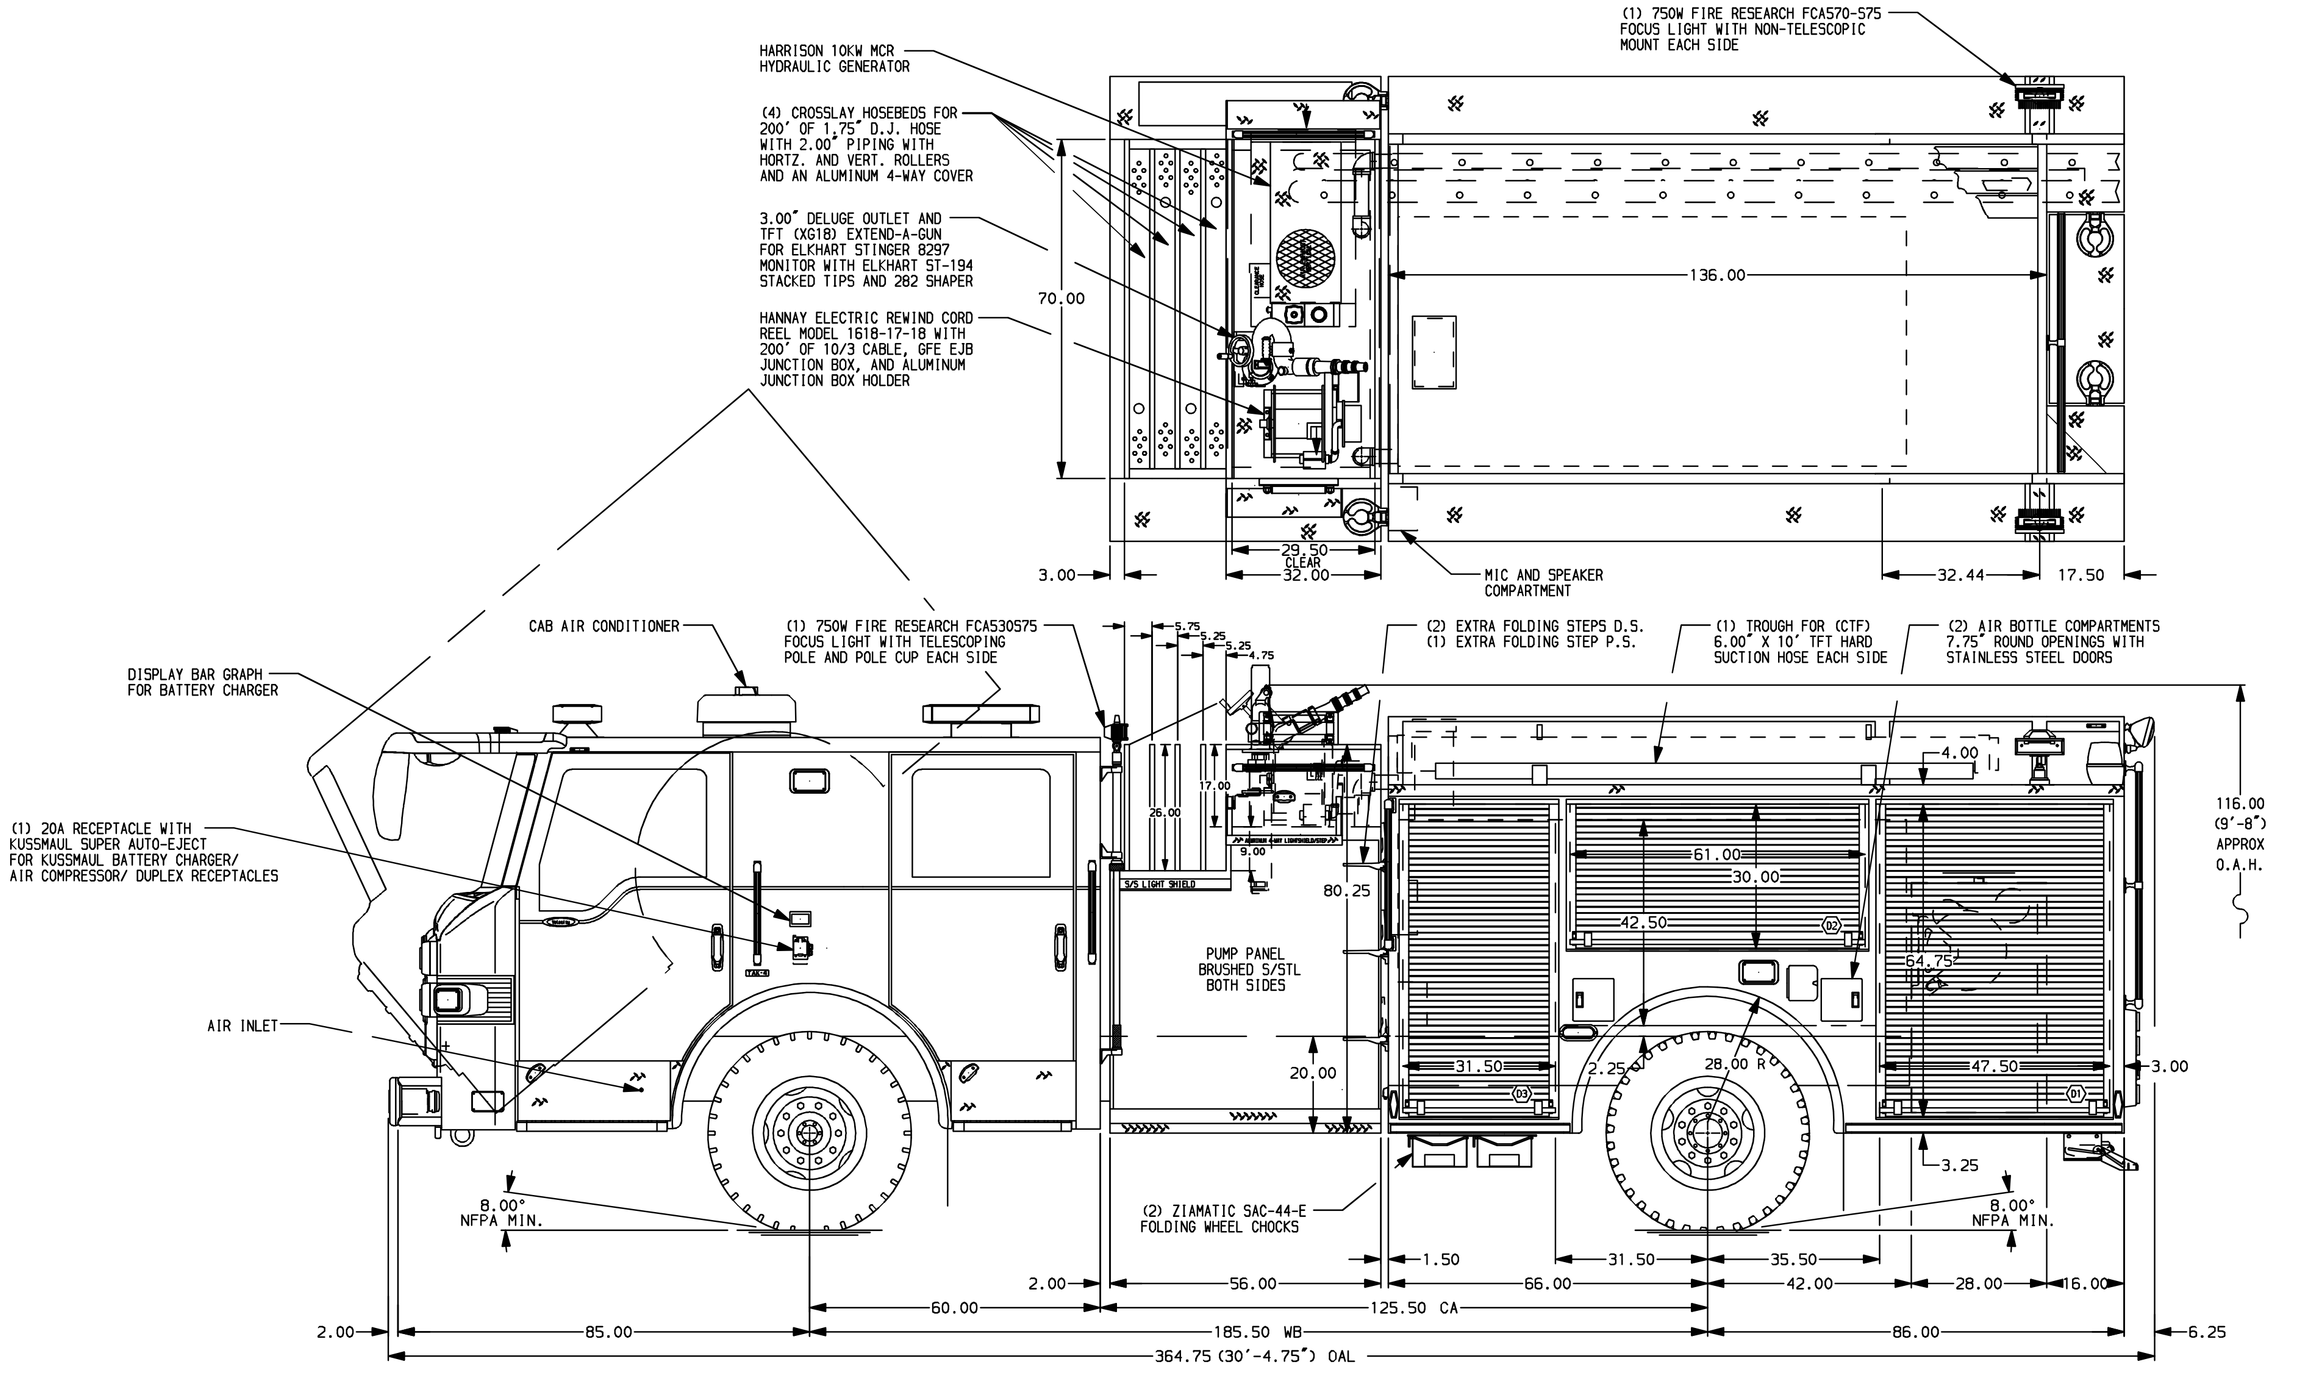

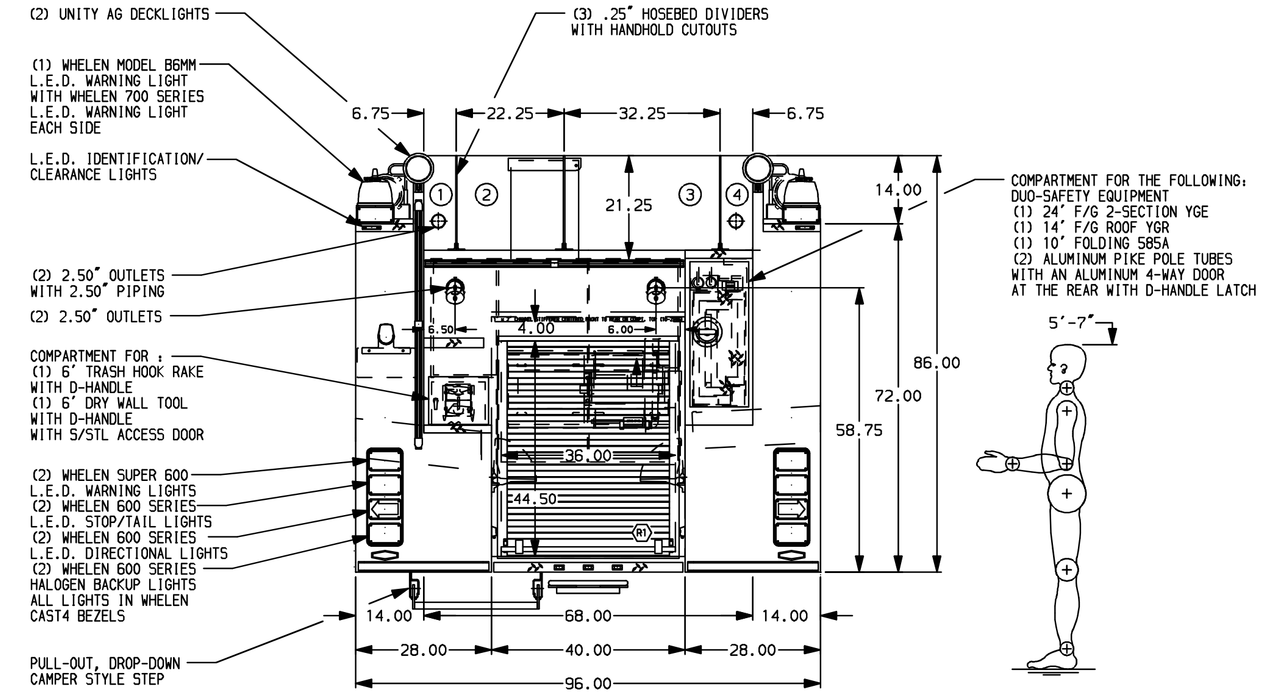

HOSEBED CAPACITIES
1. 200' OF 2.50" D.J. HOSE
2. 1000' OF 3.00" D.J. HOSE
3. 1000' OF 5.00" D.J. HOSE
4. 200' OF 2.50" D.J. HOSE

ALUMINUM BODY

MAXIMUM O.A.H. 116.00"

SIDE ROLL PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
2. MOUNTING BASES FOR ANTENNAS LOCATED PER SHOP ORDER
3. KUSSMAUL PUMP PLUS 1200 BATTERY CHARGER LOCATED IN CREW CAB SEAT RISER
4. S/STL SCUFFPLATE AROUND FUEL FILL OPENING
5. S/STL SCUFFPLATE ON REAR OUTER CORNER OF BODY
6. S/STL PROTECTIVE GUARD FOR ROLL-UP DOOR LOCATED R1
7. TURTLE TILE MATTING ON FLOORS OF ALL BODY COMPARTMENTS EXCEPT P1 & R1
8. TURTLE TILE MATTING ON ALL SHELVES
9. PAC TRAC ON THE REAR WALL OF COMPARTMENT D2
10. ONE ADJUSTABLE SHELF IN COMPARTMENTS D1, P1 & R1; TWO IN D3 & P3
11. CIRCUIT BREAKER PANEL IN COMPARTMENT D3
12. STAINLESS STEEL FENDER CROWNS FRONT AND REAR
13. PIERCE LOGO MUDFLAPS FRONT AND REAR
14. ALUMINUM 4-WAY ON FRONT OF BODY
15. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
16. ONE FLOOR MOUNTED SLIDE-OUT TRAY WITH 2.00" SIDES IN COMPARTMENT P1 & R1
17. STAINLESS STEEL DRIP PANS IN ALL COMPARTMENTS
18. ONE 15A, 120V 6-PLACE RECEPTACLE LOCATED IN EACH EMS CABINET; TWO IN CAB
19. ONE HANNAY ELECTRIC REWIND CORD REEL MODEL 1618-17-18 IN COMPT. R1 WITH 200' OF 10/3 CABLE, GFE EJB JUNCTION BOX, AND ALUMINUM JUNCTION BOX HOLDER

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

REV	DATE	BY	CH
V	25FEB09	NPA	SHA
V	04FEB09	NPA	SHA

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY

Pierce MANUFACTURING INC.

TITLE: 1500-D-750 GAL POLY, 152" FULL HGHT FDLER BODY (4) XLAYS, LADDERS BESIDE TANK, DELUGE, GENERATOR

FOR: CITY OF YORK, YORK, PENNSYLVANIA

DWG NO. 21665AD

JOB NO.	21665 01-02
SCALE	1:24
DATE	
DRAWN BY	NPA
DATE	12NOV08
CHECKED BY	SHA
DATE	12NOV08
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 25-FEB-2009 12:39:53