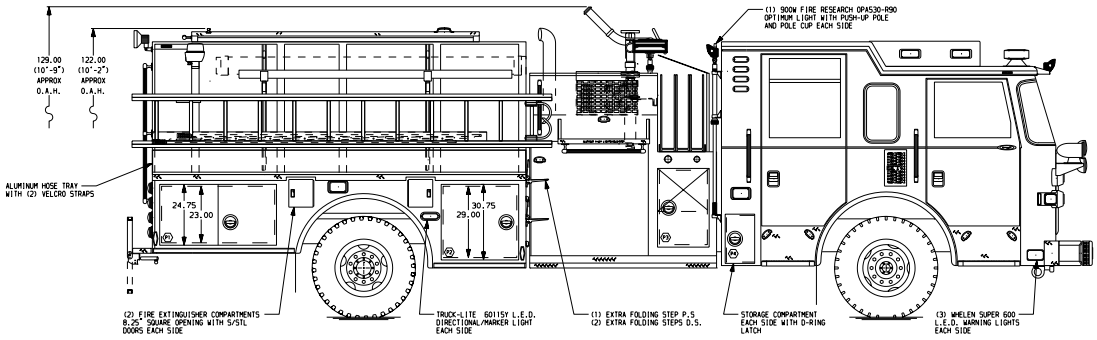

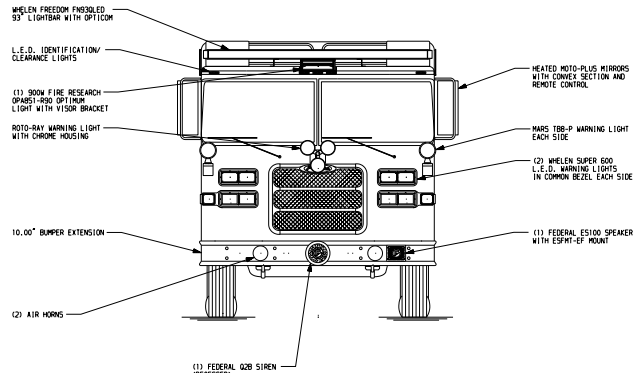

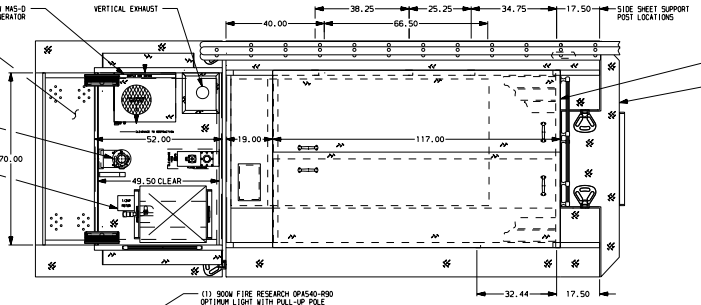

HOSEBED CAPACITIES
1. 300' OF 3.00" D.J. HOSE
2. 300' OF 2.50" D.J. HOSE
3. 300' OF 2.50" D.J. HOSE
4. 2000' OF 5.00" D.J. HOSE

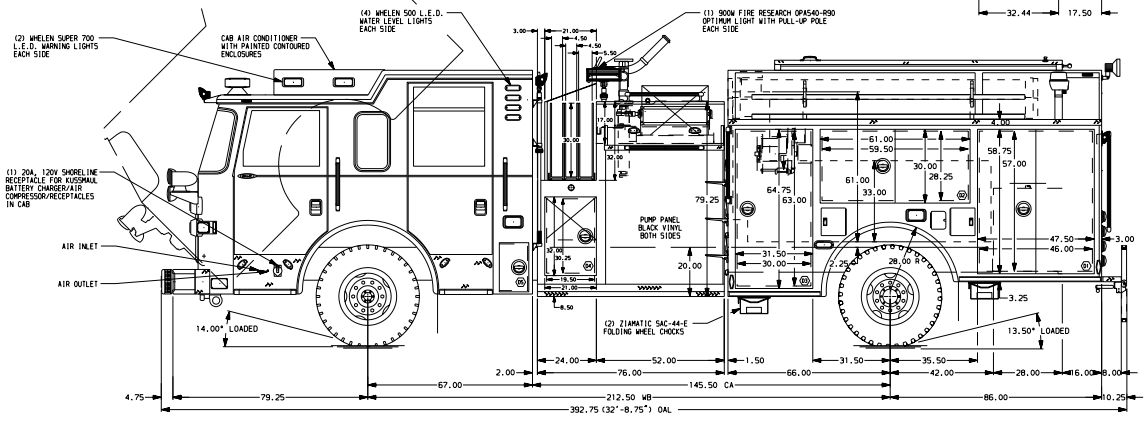

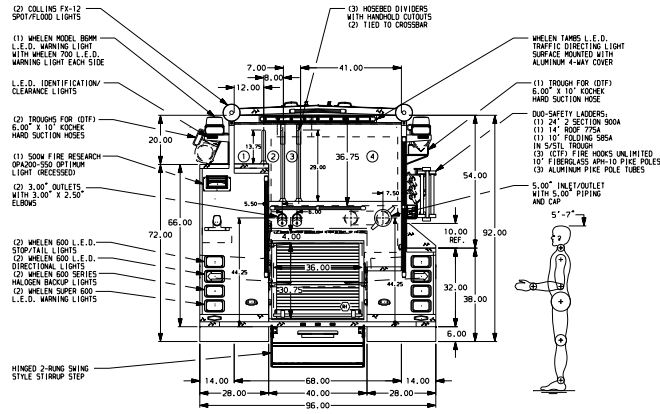

ALUMINUM BODY

SIDE ROLL PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. POLISHED S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
2. MOUNTING BASES FOR ANTENNAS LOCATED PER SHOP ORDER
3. VEHICLE DATA RECORDER
4. KUSSMAUL 1200 BATTERY CHARGER LOCATED IN CREW CAB SEAT RISER
5. BATTERY CHARGER INDICATOR LOCATED ON D.S. SEAT RISER
6. S/STL SCUFFPLATE ON REAR OUTER CORNER OF BODY
7. REVERSED HINGED DOOR ON COMPARTMENTS D3 & P2
8. S/STL SCUFFPLATE ON BOTTOM EDGE OF DOOR FRAMING OF COMPARTMENTS D1, D2, D3, P1 & P2
9. S/STL SCUFFPLATE INTERIOR OF DOOR IN COMPARTMENTS D1, D2, D3, D4, P1, P2 & P3
10. BOLT-IN PARTITION BETWEEN COMPARTMENTS D1-R1 & P1-R1
11. CIRCUIT BREAKER PANEL IN COMPARTMENT D3
12. STAINLESS STEEL FENDER CROWNS FRONT AND REAR
13. PIERCE LOGO MUDFLAPS FRONT AND REAR
14. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
15. DUAL ANDOR L.E.D. LIGHT STRIPS IN COMPARTMENTS D1, D2, D3, D4, P1, P2, P3 & R1
16. ONE HANNAY ELECTRIC REWIND CORD REEL 1618-17-18 WITH CAPACITY FOR 200' OF 10/4 CABLE LOCATED IN COMPARTMENT D3
17. TWO 20A, 120V 6-PLACE RECEPTACLES LOCATED IN CAB
18. TWO 20A, 120V DUPLEX RECEPTACLES LOCATED IN CAB

REV	DATE	BY	CH
2	03MAR10	NPA	SHA
1	10FEB10	NPA	SHA

CUSTOMER APPROVAL
APPROVED BY:
DATE:

CHASSIS DATA
MAKE: PIERCE
MODEL: AX6710

Pierce MANUFACTURING INC.

TITLE: 1500-D-600 GAL POLY, 152" BODY, SIDE CONTROL (3) XLAYS, DELUGE, GENERATOR, BOOSTER REEL
FOR: WILLOW STREET FIRE COMPANY WILLOW STREET, PENNSYLVANIA
DWG NO.: 23090AD

JOB NO.	23090
SCALE	1:24
DATE	06JAN10
DRAWN BY	NPA
CHECKED BY	SHA
DATE	06JAN10
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 03-MAR-2010 15:51:08